



WATER COOLED

# Water Cooled Packaged Units



# temperzone

climate innovations




PROUDLY MADE  
IN AUSTRALIA



CWP 63 ~ 1030

#### Product of the year category

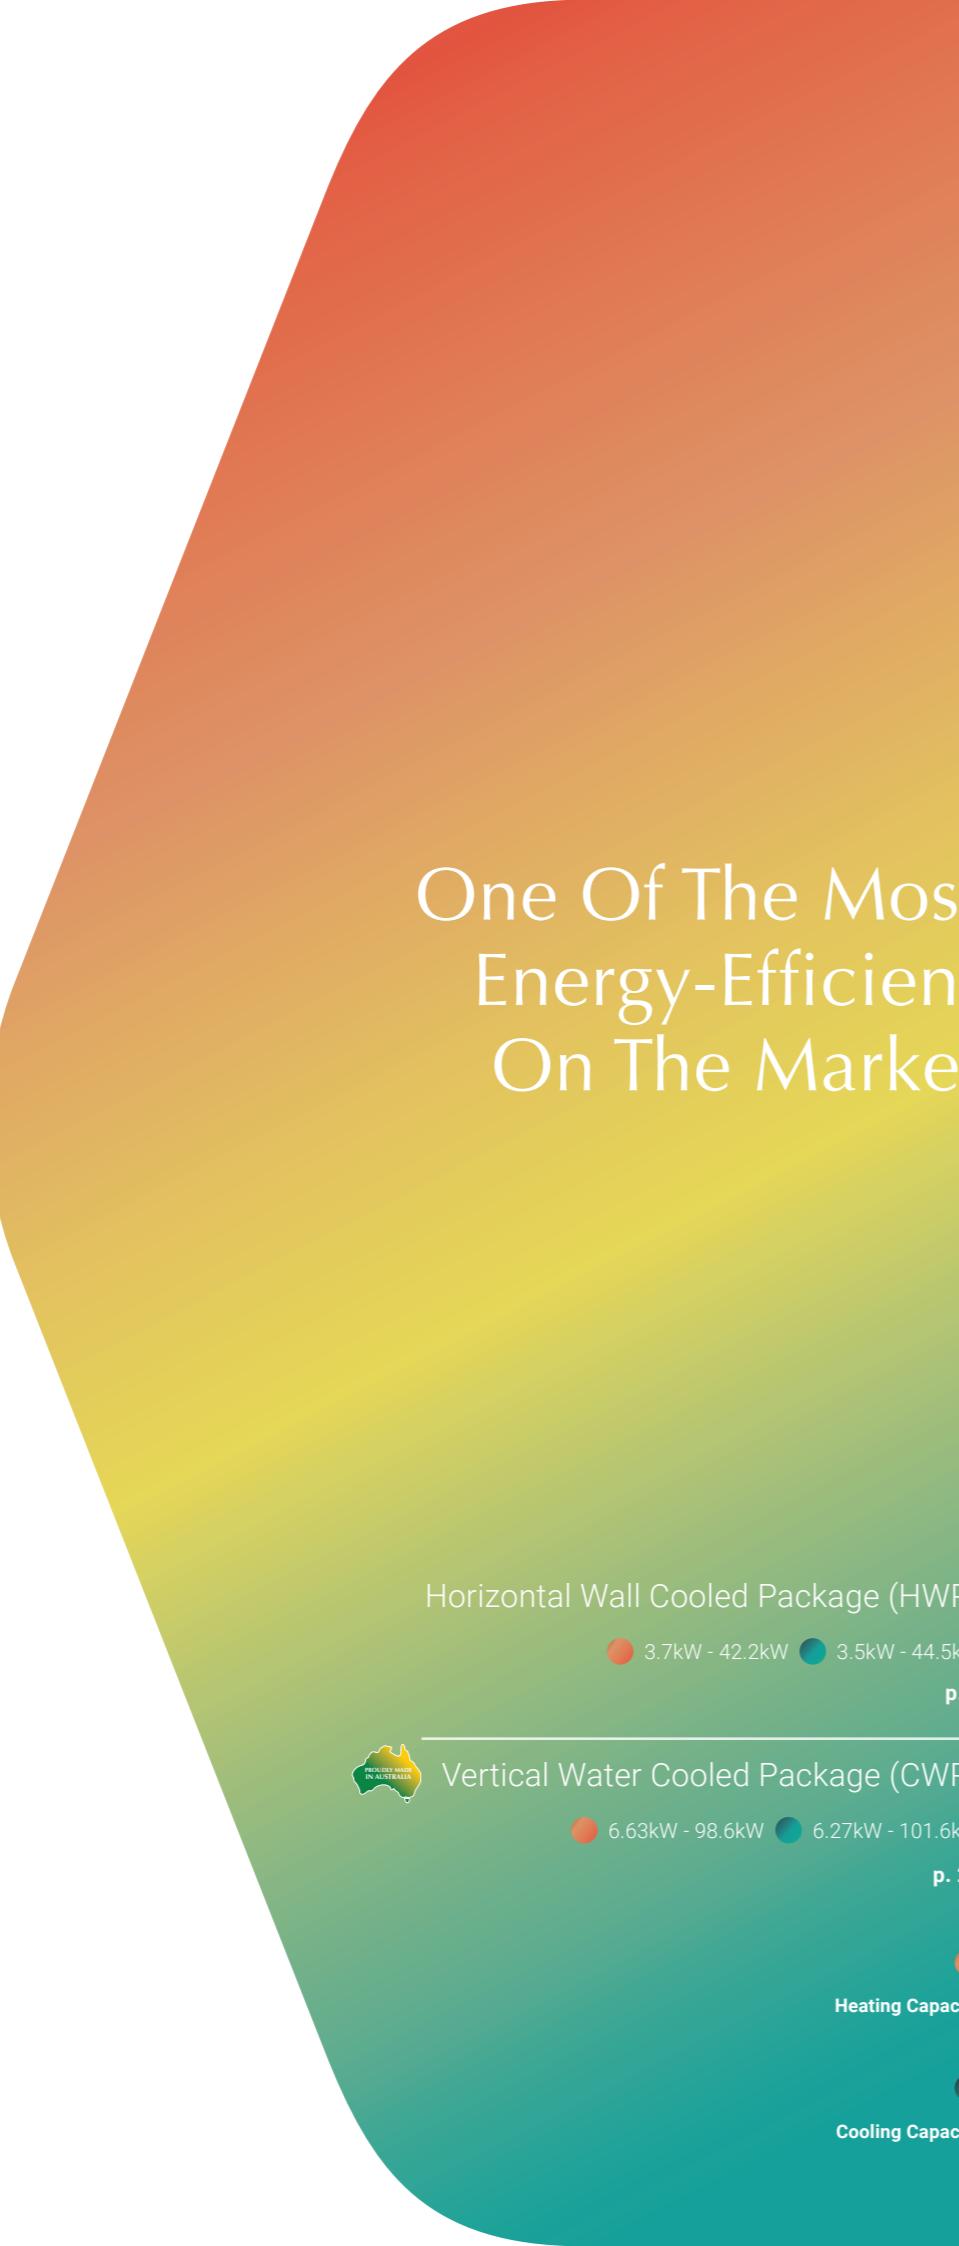

One Of The Most  
Energy-Efficient  
On The Market

Horizontal Wall Cooled Package (HWP)

● 3.7kW - 42.2kW ● 3.5kW - 44.5kW

p. 6



Vertical Water Cooled Package (CWP)

● 6.63kW - 98.6kW ● 6.27kW - 101.6kW

p. 22

●  
Heating Capacity

●  
Cooling Capacity



# Over 65 Years of Industry Expertise

We're dedicated to pioneering innovative new technologies which make installation a breeze and provide perfect comfort all year round.

## **The sky's the limit with Temperzone water-cooled systems**

When buildings head skyward, only Temperzone's water-cooled air conditioning system have what it takes to meet your climate control challenges.

A key fixture of many CBD high-rise developments throughout Oceania and Asia, our innovative water-cooled units are more reliable, economical, flexible, and environmentally friendly than most air-cooled alternatives. While other systems struggle to deliver as the floors stack up, our technology has been engineered to deliver optimum performance in multi story buildings particularly those exceeding 15-storeys.

## **Why water-cooled units lead the way up high**

Temperzone's water-cooled technology combines the benefits of a water-cooled condenser with an air-cooled evaporator, delivering a level of performance that air-cooled units can't.

Available in capacities from 3.5kW to 101.6kW, they're also designed to run on individual power sources, eliminating the need to install expensive central plants. And because they're designed to fit into virtually any internal space or cavity, they're ideal for high-rise buildings that prohibit the use of balcony units.

Temperzone water-cooled systems can play a central role in developing a sustainable energy strategy or energy upgrade for any building.



# HWP ECO Range Features

## HWP-Y Series

HWP-Y Series

R410A



**High Efficiency EC Fan**  
Can be controlled either as selected speeds or by 0-10VDC




**Thermoshell**  
Lower pressure drops.  
Water loop Anti-Fouling design with higher performance



**Compact Design**  
Built to fit most applications




**Wide ESP**  
With EC fan technology, air balancing is simple



**External Control**  
Can be operated through relays. Simple terminals for compressor control On/Off and modulation, fan speed and cycle modes



**Local Key Pad**  
Can operate with selected Temperzone local controllers



**BMS**  
Can be controlled through RS485 Modbus. This also provides a wealth of data



**Electronic Expansion Valve**  
The HWP 142 ~ 275 have electronic expansion valves for greater control and efficiency



**Wide Range Water Temperature\***  
Water temperatures from -5°C to +50°C




**Cooling Only**  
All HWP units are available made to order as cooling only



**Reverse Cycle**  
All HWP units are available as reverse cycle for projects that require heating from the water loop



**Cooling with Electric Heating**  
All HWP units are available as cooling only with additional electric heaters. Heaters have double high temperature safeties

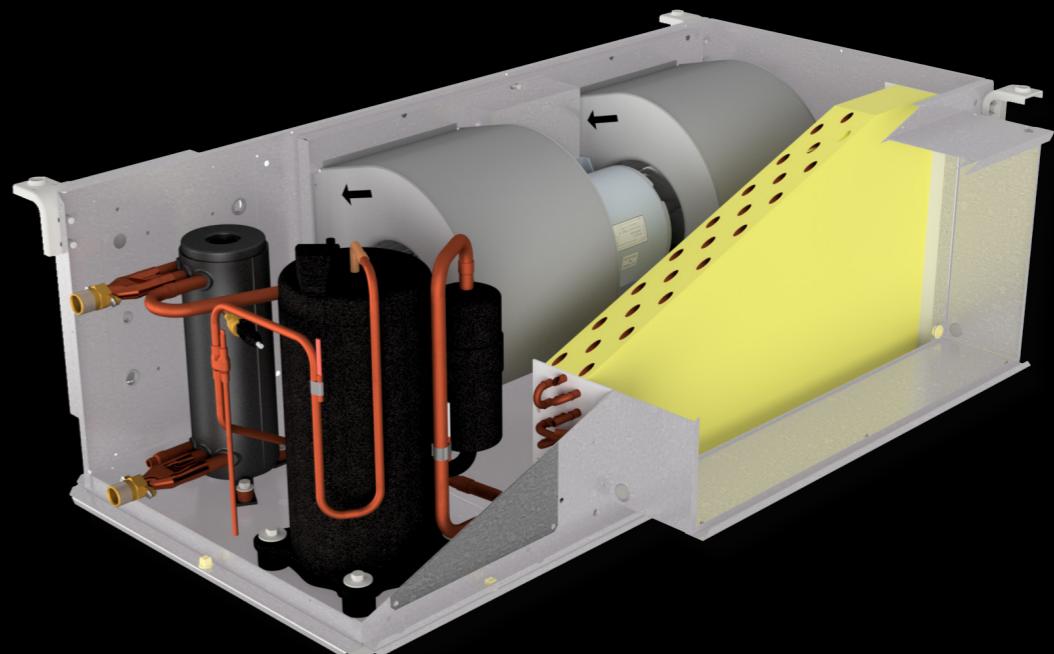

\* Conditions apply


# Simultaneous Cooling and Heating

Simultaneous same-floor cooling and heating via a single water piping system



## Extended Cooling & Heating Functions

The lower end of cooling and heating functions have been extended to enable a water temperature operating range to 5°C, creating a wider spectrum of potential applications.

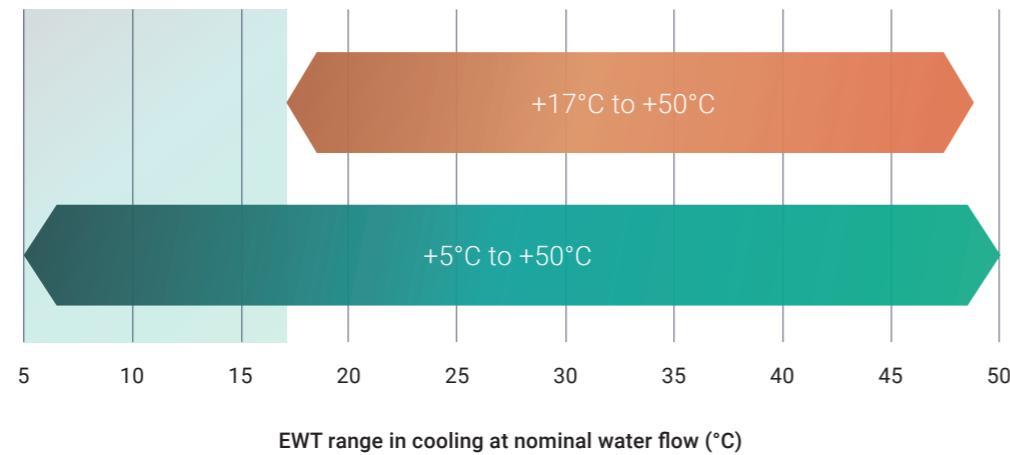


# HWP-ECO Range


The HWP-ECO Series has been developed with many innovative features allowing for complete flexibility and control in many applications

**ThermoShell®**  
Efficiency Water Side  
Heat Exchanger


Offering up to 6% reduction in nominal water flow rate and up to 34% reduction in water pressure drop, Temperzone's state-of-the-art ThermoShell® sets new standards in water-cooled technology. Enabling a reduction in hydronic equipment size, it reduces capital and operating costs while increasing building sustainability.

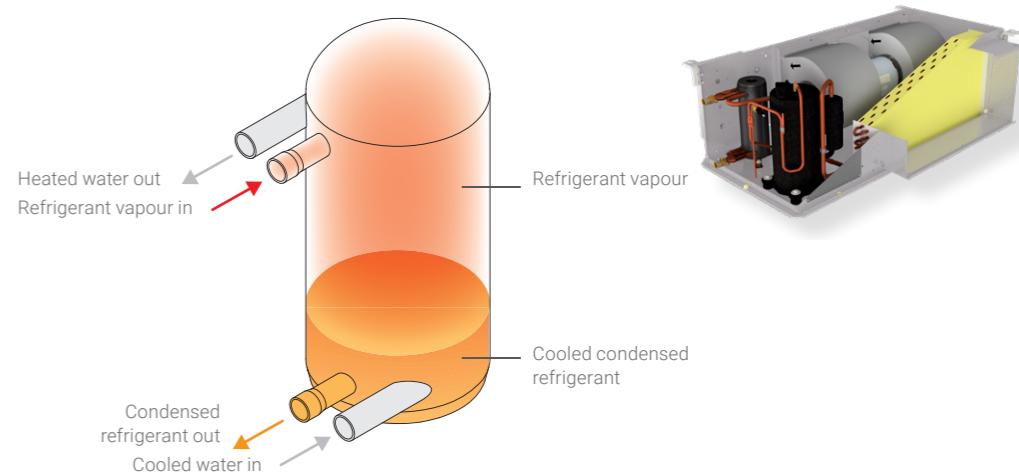

**6%**  
reduction  
Nominal water  
flow rate

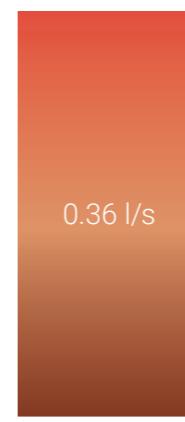

**34%**  
reduction  
Water pressure  
drop

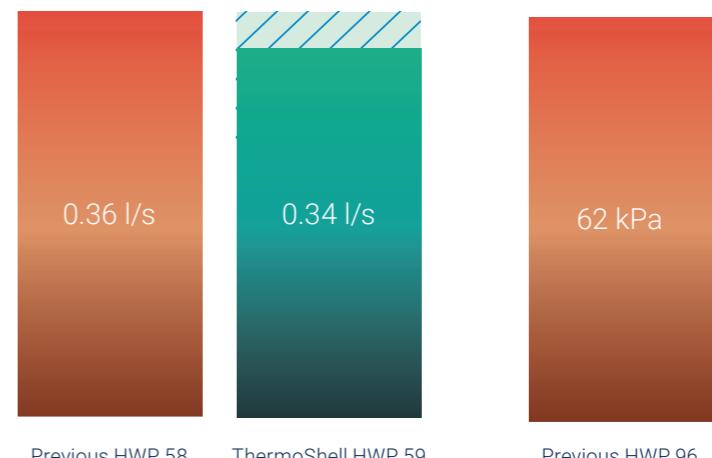

# Cost Savings with ThermoShell® Technology

Temperzone's state-of-the-art ThermoShell® sets new standards in water-cooled technology.

## Enabling Cost Savings

ThermoShell® technology is Temperzone's new high performance, compact heat-exchanger for refrigerant and water systems.


ThermoShell® enables considerably lower water flow rates and water pressure drops to be accommodated by the system, with minimal effect on duty and efficiency. This leads to a reduction in hydronic equipment size, reducing capital and operating costs.

The effect of a decreased water flow rate through a 5.9kW water cooled packaged unit with ThermoShell® was measured under laboratory conditions to examine the overall effect on duty and EER\*.

It was shown that increasing the temperature differential across the condenser to 9°C by significantly decreasing the water flow rate had only a minimal effect on the duty and EER of the unit.

Also, individual units will run much more efficiently when only a proportion of the units are operating at any one time. Therefore, real world efficiencies will be greater than design efficiencies.


\* HWP 59 was tested under typical conditions of IAT 27/19°C, EWT 30°C,

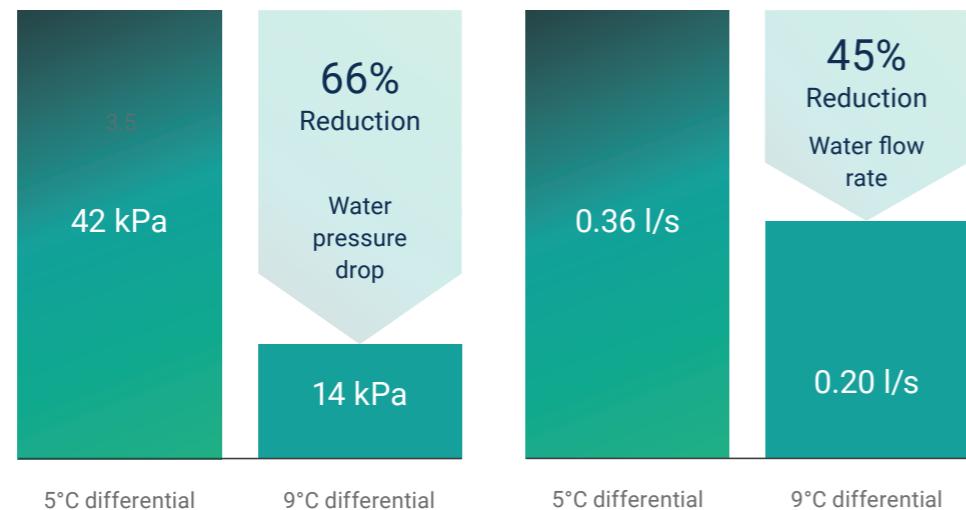

## ThermoShell Technology




ThermoShell® Heat Exchanger

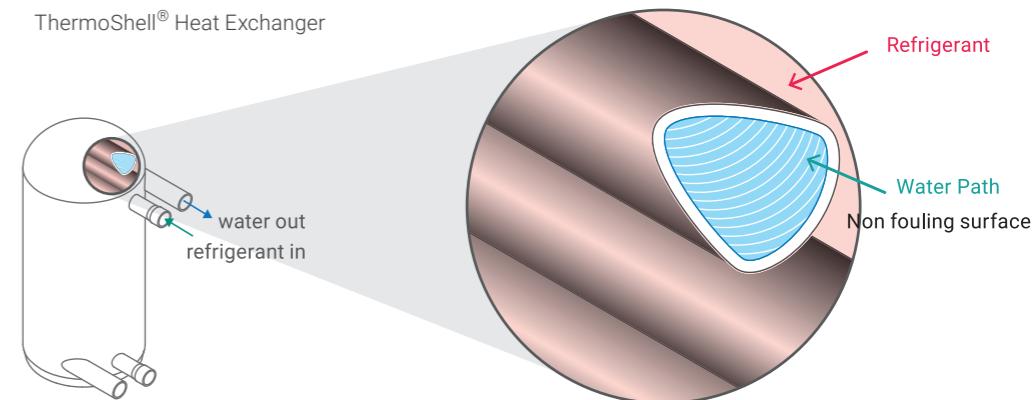


## Coaxial Heat Exchanger

Piping has a very undulated surface making it prone to extreme water fouling.

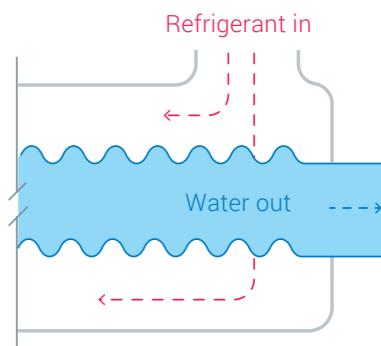

## Plate Heat Exchanger

Many plates at extremely close intervals create a very receptive fouling surface.

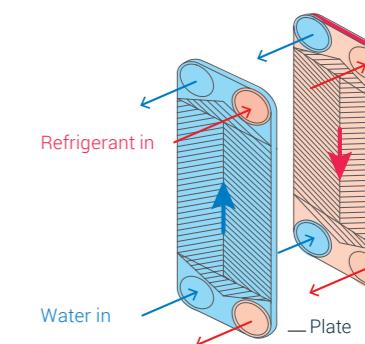


# Greater Design Flexibility

## Wider Temperature Operating Range


ThermoShell's wider water temperature operating range offers greater flexibility when retrofitted into any older installations.

In buildings where the condenser water loop is over 15 years old electric heating was widely used. As these buildings lack boilers, the addition of reverse cycle units can lead to the problem of unstable operation in heating mode.

In contrast, ThermoShell heat exchangers enable a wider water temperature operating range, allowing for greater flexibility in the condenser water loop and a maintenance of stable operation.

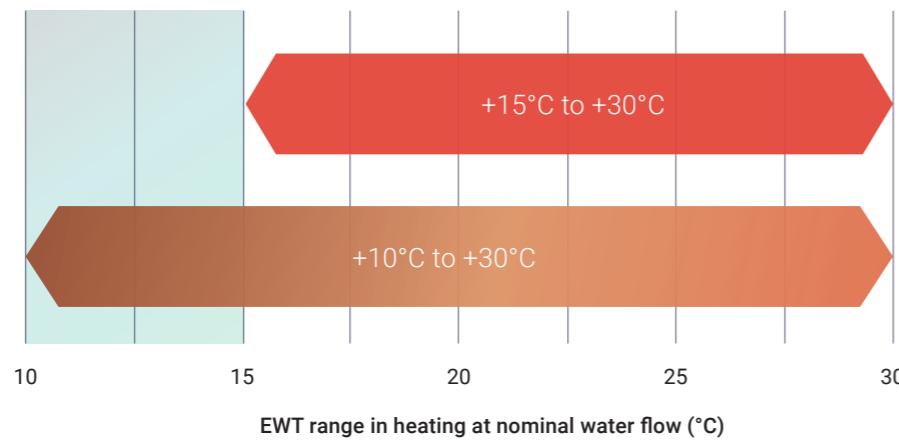


## Wider Temperature Operating Range

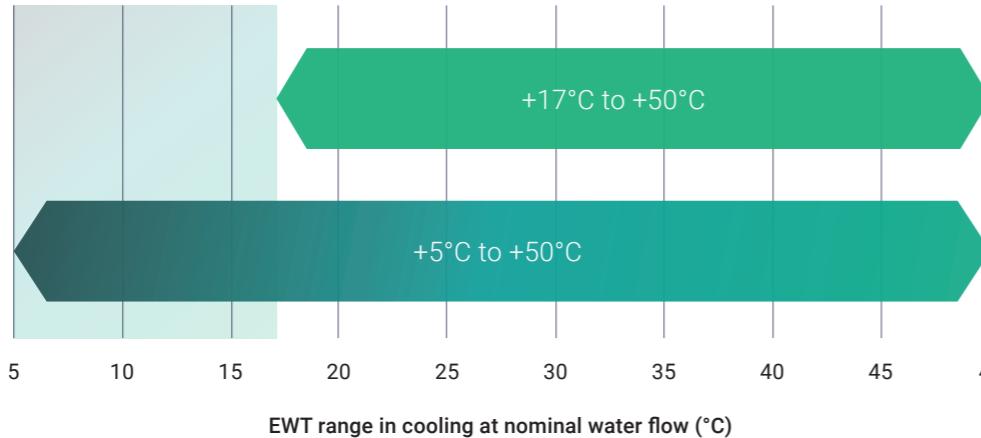

## Reduced Running Costs

Laboratory testing, outlined on the following two pages, showed that increasing the temperature differential across the condenser to 10°C has **minimal effect on the duty or EER of the units**, the increase in LWT occurs at system design conditions with the majority of operating conditions at slightly lower total system capacity than design conditions.

**The reductions in pressure drop achieved by increasing the LWT up to a 10°C differential temperature is considerable, enabling a reduction in both pipe and pump sizes throughout the building leading to reduced costs in capital equipment and running costs.**

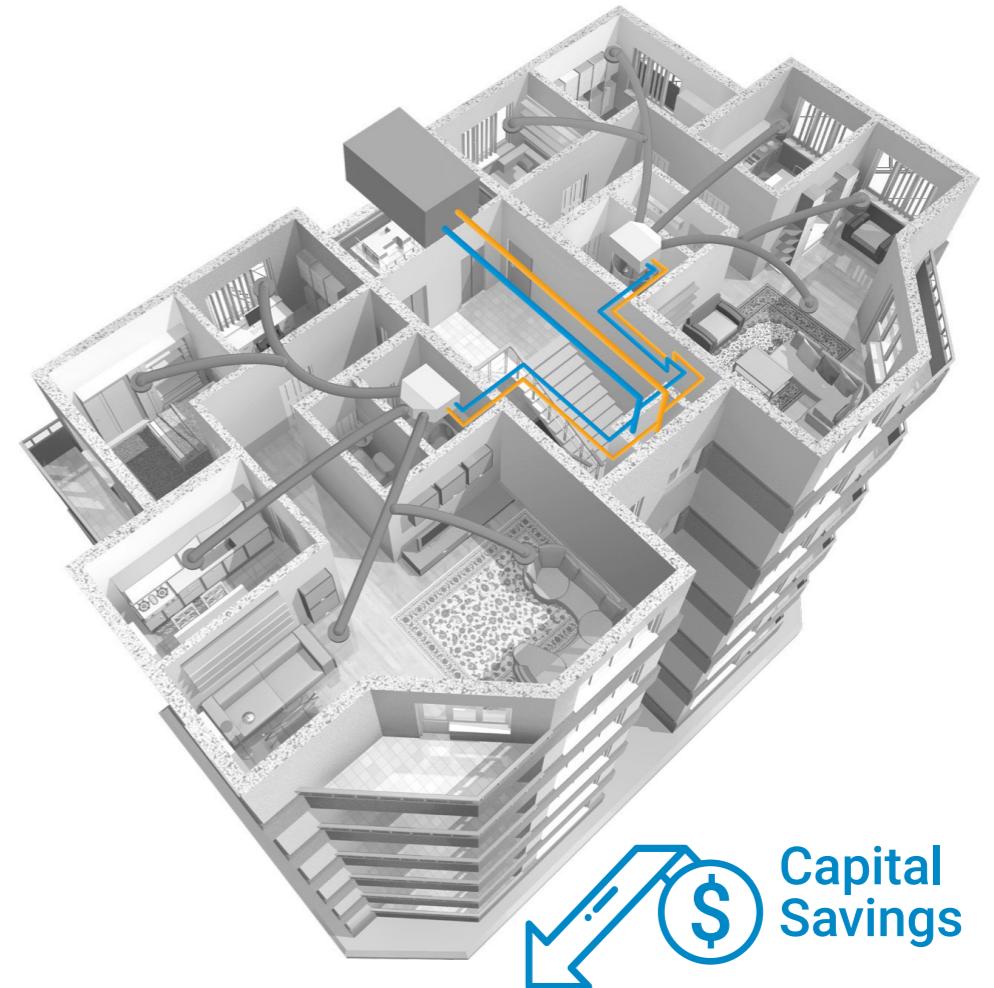



# ThermoShell® Project Savings

There are considerable capital costings in the installation of a system if the water flow rate, under design conditions, can be reduced.

Doubling the temperature differential across the condenser results in:

- › A halving of the water flow rate.
- › A quarter of the pressure drop the pump has to overcome.

This allows the pipe and pump sizing to be reduced, which results in the lowered capital cost. The advantages of an increased design temperature differential needs to be balanced with the reduction in the duty and the efficiency of the unit under design conditions. The effect of decreased flow rate through the ThermoShell was measured under laboratory conditions and the results are presented here.

## HWP 59 Performance Test


HWP 59 was tested under typical conditions of OAT 35°C, IAT 27/ 19°C, EWT 30°C with LWT ranging from 35-45°C.

EWT (°C)	30	30	30	30	30	30
LWT (°C)	35.1	37.1	39.0	41.2	43.5	45.5
<b>Flow (l/s)</b>	<b>0.36</b>	<b>0.25</b>	<b>0.20</b>	<b>0.16</b>	<b>0.13</b>	<b>0.11</b>
Duty (kW)	5.66	5.56	5.46	5.35	5.25	5.16
Power (kW)	1.55	1.56	1.59	1.64	1.70	1.74
<b>EER</b>	<b>3.65</b>	<b>3.56</b>	<b>3.43</b>	<b>3.26</b>	<b>3.09</b>	<b>2.97</b>
Water Duty (kW)	7.67	7.54	7.52	7.50	7.37	7.12
<b>Pressure Drop (kPa)</b>	<b>42.0</b>	<b>17.5</b>	<b>14.0</b>	<b>7.0</b>	<b>3.5</b>	<b>3.5</b>

## HWP 59 Performance Test

- Water Duty
- ✖ EER
- Duty
- ◆ Power

A **5°C increase in LWT** results in water flow rates down from **0.36 l/s to 0.18 l/s** and a pressure drop decrease from **42kPa to 10kPa**. This graph illustrates no significant corresponding change to duty power and EER.

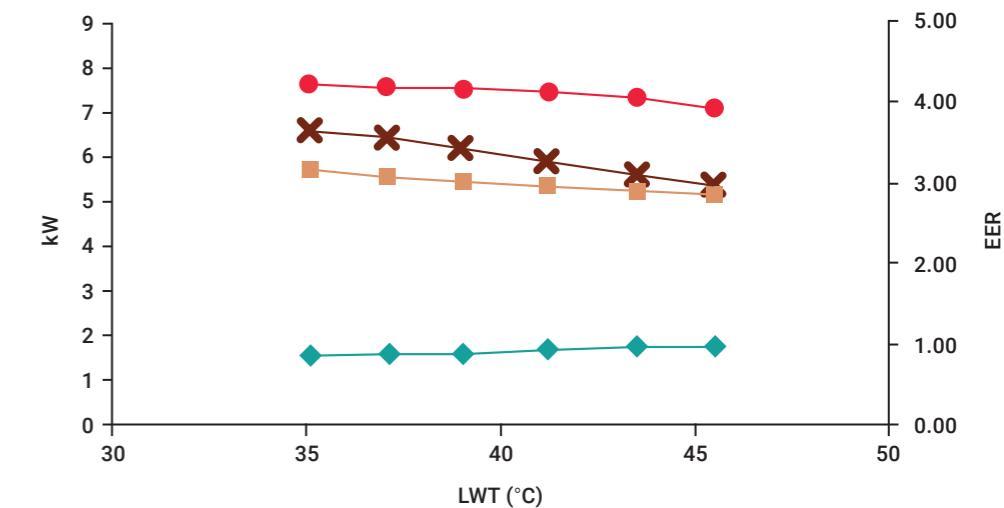

## HWP 79 Performance Test


HWP 79 was tested under typical conditions of OAT 35°C, IAT 27/ 19°C, EWT 30°C with LWT ranging from 35-45°C.

EWT (°C)	30	30	30	30	30	30
LWT (°C)	35.1	37.1	39.0	41.2	43.5	45.5
<b>Flow (l/s)</b>	<b>0.53</b>	<b>0.35</b>	<b>0.28</b>	<b>0.22</b>	<b>0.18</b>	<b>0.16</b>
Duty (kW)	7.99	7.72	7.65	7.52	7.36	7.31
Power (kW)	2.01	2.06	2.10	2.16	2.20	2.25
<b>EER</b>	<b>3.98</b>	<b>3.75</b>	<b>3.64</b>	<b>3.48</b>	<b>3.35</b>	<b>3.25</b>
Water Duty (kW)	11.00	10.70	10.50	10.20	10.20	9.82
<b>Pressure Drop (kPa)</b>	<b>70</b>	<b>28</b>	<b>21</b>	<b>14</b>	<b>7</b>	<b>7</b>

## HWP 79 Performance Test

- Water Duty
- ✖ EER
- Duty
- ◆ Power

A **5°C increase in LWT** results in water flow rates down from **0.53 l/s to 0.25 l/s** and a pressure drop decrease from **70kPa to 17kPa**. This graph illustrates no significant corresponding change to duty power and EER.

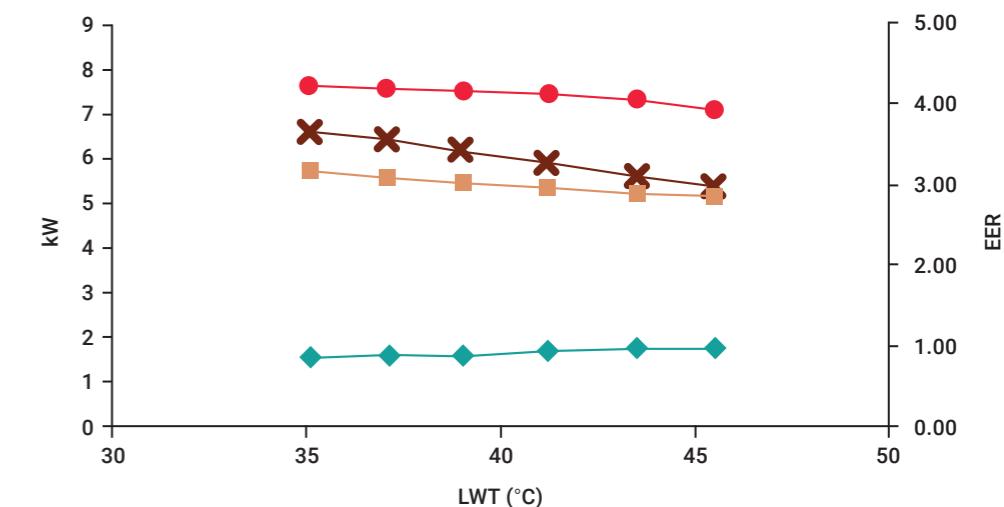

# Control Options

Temperzone's individual UC Intuitive control system makes it easy to maintain a space at the prescribed temperature.

The UC pcb not only protects the unit operation but it also provides many other key functions. It has the ability to be controlled by three different control methods (low level, local control and BMS)

## Third Party, Low level

Simple terminals allow connection to any 12VDC/24VDC controller where fan speed, mode and operation can be controlled (all HWP models).



## Local Control

Incorporating the UC8 controller (HWP36~275) can be connected to a TZT100 or SAT-3 controller via RS485 modbus.



## TZT-100

### Features

- Auto change over between cool and heat
- 7-day programmable time clock
- Key board and temperature locks
- 3 speed fan control
- Programmable occupancy inputs
- Auto start after Power failure



## SAT-3

### Features


- Input for remote on/off start
- 7 Day programmable time clock
- Sleep function
- On demand timer count down timer up to 3hrs
- Set temperature: -15 ~ 30°C at 0.5°C increments
- Auto start after power failure



# BMS Connectivity

HWP models from 36~275 can be controlled by a BMS via modbus/RS485 port with multi-unit control capability.


- Up to 99 units can be connected on a common RS485 bus in daisy chain design
- BMS communication cable (2-wire shielded)
- Maximum cable length of 1000m
- In some applications cable requirements are reduced from 11 wires to 2 with greater level of control
- Reduced wiring and labour
- Ability to monitor units from PC
- Ability for global scheduling
- Ability to view faults and operation data
- Installation of 3rd party BMS relay boards are not required providing substantial savings

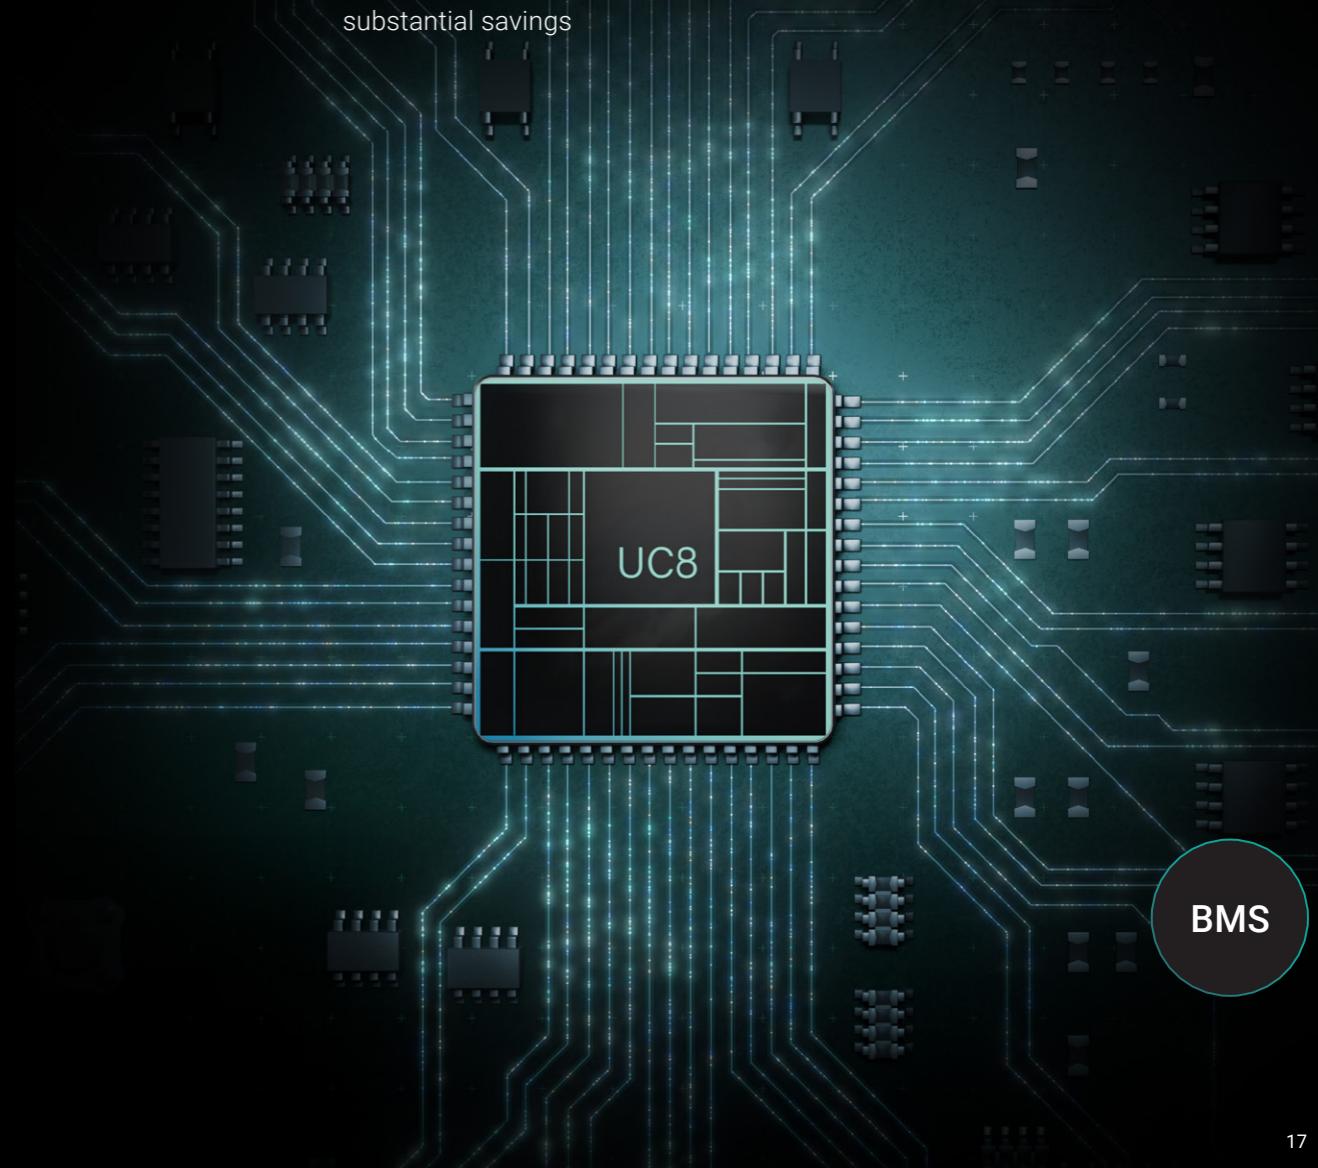

# Intuitive UC Technology Makes It Easy

The UC controller has many powerful features and is extremely flexible providing solutions that meet today's requirements.

- 1 Option for 24VAC / 12VDC control
- 2 BMS Modbus Connection
- 3 SAT-3, TZT100 or Touch Mini local controllers
- 4 Water valve control
- 5 Remote on/off e.g. for local key switch in hotel or time clock
- 6 Seven segment fault Indication

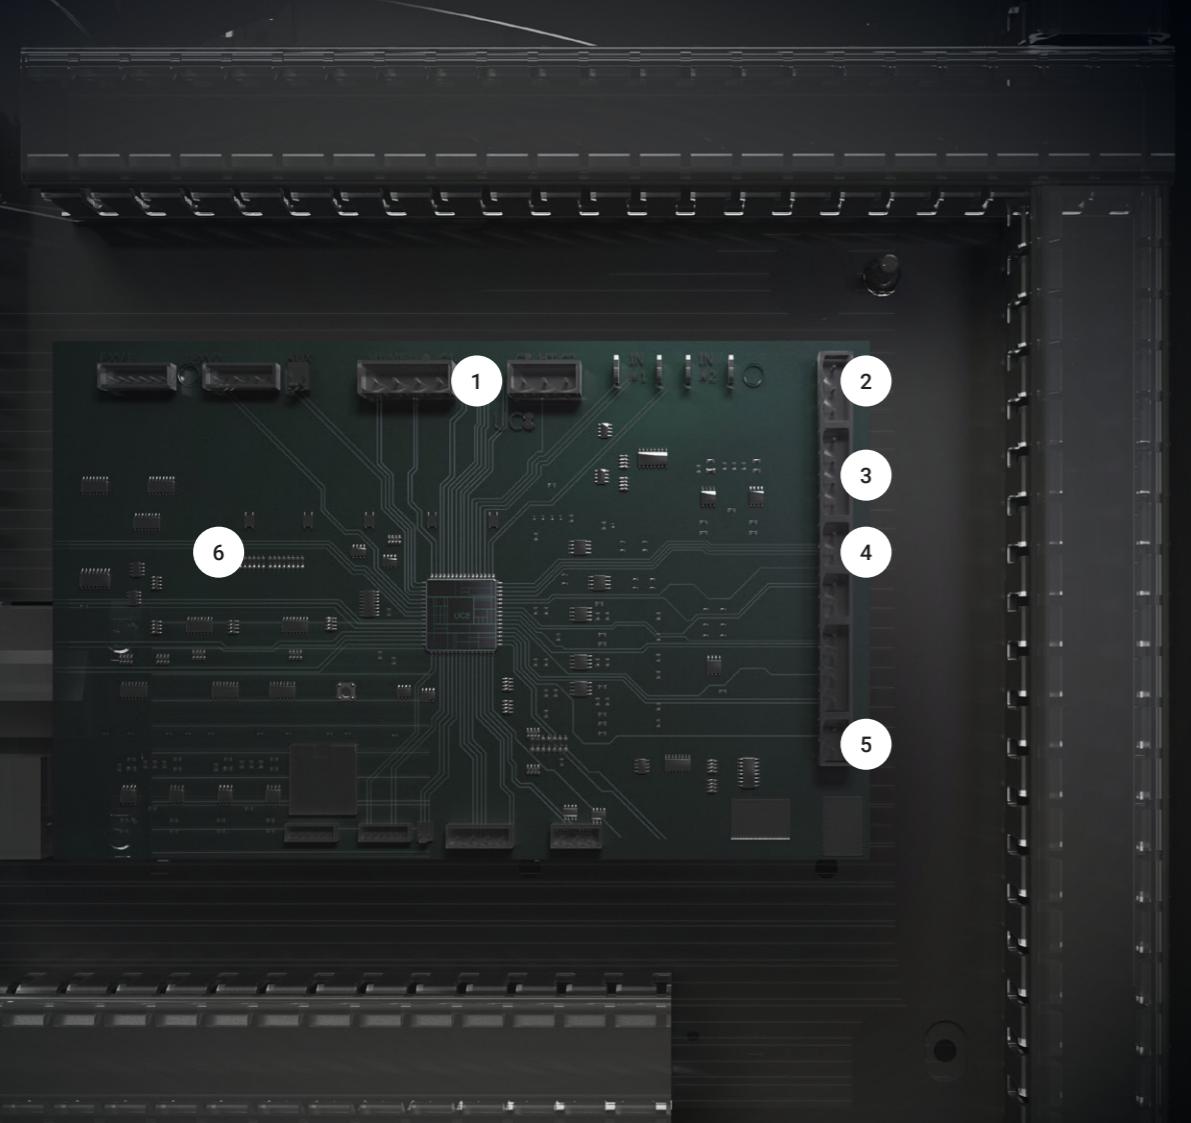

## Water Valve Control



The UC controller can operate a modulating water valve or a on/off shut off valve.

The water regulating valve 0-10VDC reference can be provided directly from the UC controller in the HWP. The water regulating valve will be controlled to obtain an optimum condensing temperature providing a higher EER at varying air on conditions.

When the unit is off the water valve control signal is at 0V, which closes the valve and stops the water flow providing the ability to reduce pump energy consumption.

When a call to cool or heat occurs the initial valve control signal is set to 10V to fully open the valve. The valve (10VDC) is given 40 seconds of time to open before the compressor is started.

When the unit is cooling the valve control signal will vary to obtain the optimum condensing temperature for efficient operation of the unit.

The valve will modulate in cooling but will operate at 100% open in heating. The other benefits of controlling the valve directly from the HWP is that no 0-10VDC BMS card is required, less wiring and no accessing the refrigeration system.

The UC controller can be used to power a water shut-off valve. This will ensure the water is not flowing through the unit when it is not operational for a long period of time. This reduces the overall central pump power usage.

## Flush Cycle



The UC controller has a flush cycle. If the valve has been closed for 24hrs it will briefly open to flush the water system and move the valve to prevent seizing.

A water flush request can be remotely issued via Modbus communications over RS485 wiring. It will cause the water valve to fully open for the duration of the request. The request is only effective when the unit is off (not cooling, not heating).

## Pump Call




The UC controller has built in pump call relays that activate whenever the compressor is required to run.

The pump call output is solid relay contacts. The contacts are voltage-free, suitable for 24V AC or 230V AC, maximum current is 0.25A. The solid-state relay cannot switch DC signals.

This provide a convenient way to manage the pump call other than operating through a BMS.

## Remote Start/Stop



A remote on/off signal can be connected to the "On" and "0V" terminals (input for a voltage-free switch or relay contact). To turn the unit on the remote on/off input must be **closed-circuit**. The compressor minimum run-time is 90 seconds.

Remote on/off is ideal for connection to key locks or motion detection in a hotel or apartment to automatically switch the unit off when not required.

# Flexible Handing Options



Flexible handing configurations available to suit the application.

## Flexible Hoses Option

HWP models 36 ~ 275 come standard with hoses. Hoses are optional for the HWP 370 & 445.



## Drain Pumps Option

The optional HWP Series Condensate lift-pump has been designed to remove condensate from the unit in tight installations where a well sloped drain line (minimum 1 in 50 gradient) is not immediately feasible. Available on all models 35 ~ 445.



## Controller Option

Optional controllers include:

- SAT3
- TZT100

All of these controllers are rich in features and can be connected to the Eco HWP models via RS485 modbus.



## Spring Kit Option

HWP models 36 ~ 445 come standard with spring mounting kits.

Spring mounting kits can be purchased separately if required.



### Standard Handing

Std Configuration	Front RH	Side RH
Electrical Panel	●	
Water Connections		●



### Opposite Handing

Std Configuration	Front LH	Side LH
Electrical Panel	●	
Water Connections		●

Opposite handing units are not stocked. They are made to order for specific projects.

●  
Standard

□  
Optional

# HWP Options & Features

The range of options available allow you to customise your desired unit, giving you ultimate control and flexibility.

Model	ECO	ECO				
	● HWP 36~118	● HWP 142~275	● HWP 36~118	● HWP 142~275	● HWP 370~445	
<b>Features</b>						
EC Fan Motor (Y) version	●	●	N/A	N/A	N/A	N/A
AC Fan Motor version	N/A	N/A	●	●	●	●
0-10VDC Fan Speed Control	●	●	N/A	N/A	N/A	N/A
Handing Options	□	□	□	□	□	□
BMS Connection	●	●	●	●	●	N/A
Pump Call	●	●	●	●	●	●
Electronic Expansion Valves	N/A	●	N/A	●	●	N/A

## Cooling & Heating

Reverse Cycle	●	●	●	●	●
Cooling Only	□	□	□	□	□
Cooling / Electrical Heat	●	●	●	●	●

## Filters

G2 Filter	●	●	●	●	●
-----------	---	---	---	---	---

## Controller Options

Modbus connection	●	●	●	●	N/A
TZT-100	□	□	□	□	N/A
SAT-3	□	□	□	□	N/A

# CWP Vertical Package Unit Features



**High Efficiency EC Fan**  
EC fans CWP 63 ~ 178



**Plug Fans**  
CWP 217 ~ 568




**Variable Pitch Pulley**  
CWP 890 & 1030



CWP 63 ~ 1030



**Wide ESP**  
Models with EC or Plug fans make airflow control simple



**External Control**  
External controller can easily be connected through relay terminals



**Powder Coated Cabinet**  
Advanced powder coating ensures sheet metal life and provide a more aesthetically pleasing finish



**Top Discharge Supply Air**  
All models have a standard top supply air configuration however some larger models have an option for back supply air



**Cooling With Electric Heating**  
CWP 60 ~ 178 models are available as cooling only with electric heaters. Heaters have double high temperature safeties




**Cool Only**  
CWP 890 & 1030 models are available made to order as cooling only



**Reverse Cycle**  
All CWP units are available as reverse cycle for projects that require heating from the water loop



**Service Access**  
Simple access to compressors and heat exchangers

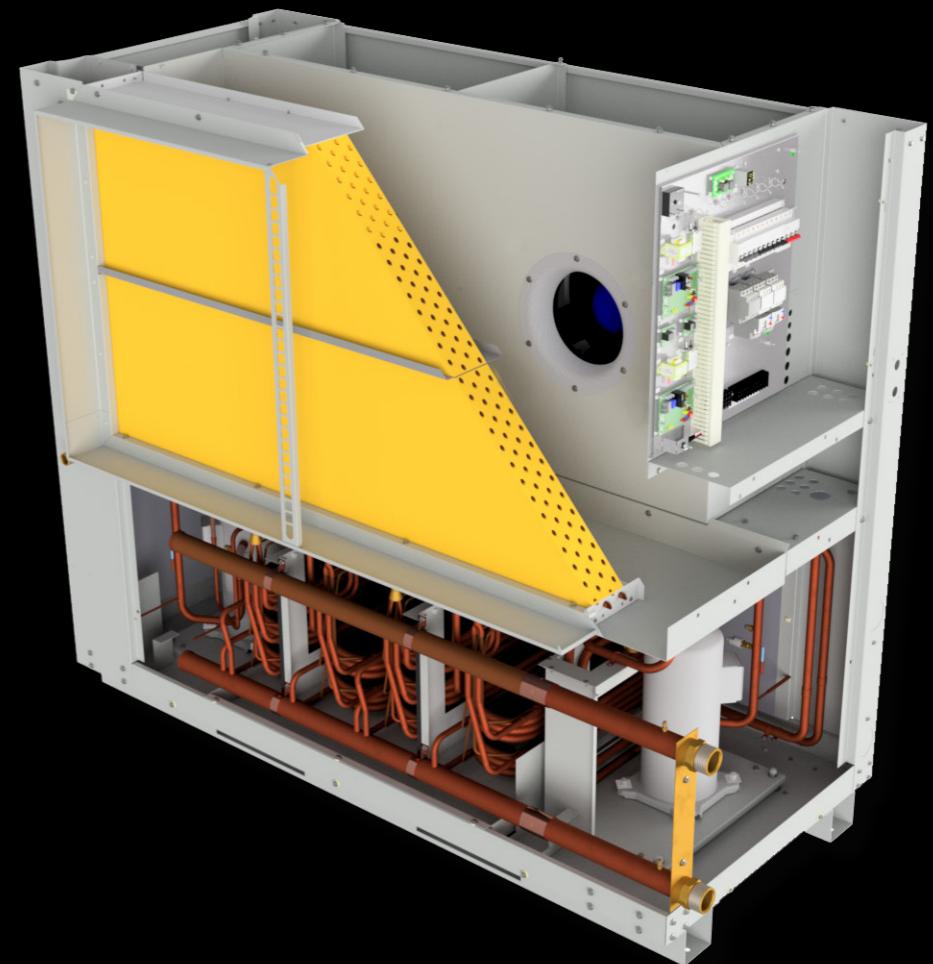

# Evolving Water-Cooled Systems

Rather than having to plan your entire air conditioning layout in advance, Temperzone's water-cooled modular technology offers you the unique ability to expand or adapt your system as a building's commercial demands evolve.

## Complete Solutions

Multiple units can be used to cater for vastly different uses within the same building. For example, you can choose to cool or heat a large open-plan office area while also employing a range of separate water-cooled units to service 20 small meeting rooms. And because each unit connects to an individual metre and power source, users are only billed for their own usage. It's just another way Temperzone's water-cooled range gives tenants complete control of their air conditioning needs.

## CWP-K Series

The CWP-K Series of vertical discharge water cooled package units have been designed to provide year round comfort to the space they are serving. The CWP-K units have been designed and developed to comply with AS / NZS 3823 specified conditions. The CWP-K units are available in four versions:

- › **RE** - Reverse Cycle / Electric Heat
- › **CE** - Cooling Only / Electric Heat
- › **R** - Reverse Cycle
- › **C** - Cooling Only

CWP 60 ~ 178 models are also available with either top condenser water connections, or front condenser water connections.

Multiple CWP-K units are typically part of an overall hydronic system that incorporates some form of heat rejection equipment, usually a Cooling Tower or a Radiator cooler (Dry Cooler).



## Refrigerant

Each unit is factory charged with refrigerant R410A, which is deemed to have an ODP (Ozone Depletion Potential) of Zero.

## Evaporator Coil

Manufactured by Temperzone, this is a die formed plate type, epoxy coated aluminium fins mechanically bonded to high efficiency rifle bored copper tube.

## Condenser Coil

Manufactured by Temperzone, this is a copper / copper tube in tube type with refrigerant flow in the annular space and water counter flow in the inside tube. Tested to a maximum water pressure of 2760kPa (400psi)

## Construction

Galvanised steel construction, the cabinet is finished in a baked powder coat finish, closed cell foam insulation is used, with a polyester galvanised sheet steel / baked polyester powder coat finish condensate drain tray, insulated to avoid sweating.

## Compressor

A high efficiency scroll compressor or compressors are used within the units

## Insulation

CWP units are well insulated to minimise condensation and attenuate noise.

# Flexible Handing Options



Flexible handing configurations available to suit the application.

## Flexible Hoses Option

Hoses are an optional extra. There are difference hoses available depending on the model.

CWP 63 (20mm x 600mm)  
CWP 83~109 (25mm x 800mm)  
CWP 132~178 (32mm x 1300mm)



## EEV Option

EEV offers optimum control of superheat for outstanding comfort and humidity control.  
Available as a custom option from the CWP 217 ~ 1030



## Standard Handing

Std. Configuration	Water Connections
CWP 63 ~ 178	Top RH, or Front RH
CWP 217 ~ 374	Front RH
CWP 447 ~ 1030	Side RH



## Opposite Handing

Std. Configuration	Water Connections
CWP 217 ~ 374	Front LH
CWP 447 ~ 1030	Side LH

Opposite handing units are not stocked.  
They are made to order for specific projects.



## Digital 1st Stage Option

Custom option available for improved capacity control. 0-100% continuous modulation enables wide capacity range and provides better humidity control at low capacity. Available as a custom option from the CWP 217 ~ 1030

- Standard
- Optional

# CWP Options & Features

The range of options available allow you to customise your desired unit, giving you ultimate control and flexibility.

## Model

● CWP 63 ~ 178   ● CWP 217 ~ 568   ● CWP 890   ● CWP 1030

## Features

EC Fan Motor (Y) version	●	N/A	N/A	N/A
AC Fan Motor version	N/A	N/A	●	●
EC Plug Fan	N/A	●	□	□
0-10VDC Fan Speed Control	●	●	□	□
Number of circuits	1	2	2	4
Epoxy coated evaporator coil	●	●	●	●
Water hoses	□	N/A	N/A	N/A
TZ Protection PCB	●	●	●	●

## Cooling & Heating

Reverse Cycle	●	●	●	●
Cooling Only	□	□	□	□
Cooling / Electrical Heat	●	●	●	●

## Filters

1/2" Panel Filter	●	□	□	□
-------------------	---	---	---	---

## Australian Made

CWP 63 ~ 1030 are manufactured in our Sydney Factory. The famous Australian Made logo is Australia's most trusted, recognised and widely used country of origin symbol, and is underpinned by a third-party accreditation system, which ensures products are certified as 'genuinely Australian'.



CWP 63 ~ 1030

# ThermoShell® Case Study

## Case Study

This apartment project in Melbourne, with over 200 ThermoShell HWP units, utilised the water-flow flexibility the ThermoShell allows to gain significant capital and installation savings:

- › Delta T changed from 5.5 to 11.5 on average.
- › Flow rate reduced from approximately 70 l/s to approximately 33 l/s.

Original design pump sizes were 2 x 18.5kW pumps, revised design reduced them to 2 x 11kW pumps.

Original design required a main 250mm steel riser, before tapering down. Revised design reduced main riser to 150mm copper.



## Customer Care

Temperzone Customer Care is designed to deliver the highest level of support and accessibility to all our customers. This program provides factory trained technicians with the ability to resolve issues on-site, significantly reducing guesswork from commissioning.

With Temperzone products continually evolving to provide higher levels of efficiency, control and protection we want our customers to have the comfort of knowledge that Temperzone will be there right along-side them for the entire product life cycle.

Temperzone offers a wide range of training courses in application, service and commissioning.



# ECO Range

## HWP-Y Specifications

Horizontal-Single Phase



# ECO Range

## HWP-Y Specifications

Horizontal-Three Phase



Model

● HWP 36Y   ● HWP 48Y   ● HWP 59Y   ● HWP 79Y   ● HWP 98Y

● HWP 118Y   ● HWP 142Y   ● HWP 172Y   ● HWP 192Y   ● HWP 255Y   ● HWP 275Y

Capacity (Range) kW\*

Nominal Cooling Capacity (kW) <sup>2</sup>	3.5	4.4	5.9	8.1	9.9
Net Cooling Capacity (kW)	3.4	4.3	5.7	7.9	9.8
Efficiency Cooling (EER/AEER) <sup>7</sup>	3.69 / 3.67	3.79 / 3.77	3.75 / 3.73	3.94 / 3.92	3.95 / 3.94
Heating Capacity (kW) <sup>3</sup>	3.7	4.6	5.4	8.9	11.3
Efficiency Heating (COP/ACOP)	4.08 / 4.04	4.17 / 4.14	3.87 / 3.85	4.36 / 4.35	4.35 / 4.34
Electric Heat Option (kW)	2	2	3	4	4

12.2	14.7	18.5	21.2	25.5	27.5
11.9	14.1	17.4	19.9	24.8	26.7
4.17 / 4.16	4.45 / 4.44	4.35 / 4.32	4.44 / 4.42	4.65 / 4.63	4.48 / 4.47
11.6	14.5	16.7	18.6	23.0	24.6
3.92 / 3.91	4.36 / 4.35	4.28 / 4.25	4.32 / 4.30	4.59 / 4.58	4.37 / 4.36
6	6	9	9	12	12

Airflow

Nominal Supply Air Flow (l/sec)	190	230	320	500	560
---------------------------------	-----	-----	-----	-----	-----

620	775	1015	1160	1220	1400
-----	-----	------	------	------	------

Noise Data<sup>4</sup>

Sound Pressure Level (db(a))	35	35	41	45	44
------------------------------	----	----	----	----	----

50	51	54	53	55	54
----	----	----	----	----	----

Power

Power Supply <sup>1</sup>	Single Phase (230 - 240V 50Hz)				
Run Amps at Nominal Condition <sup>6</sup>	4.0	5.0	6.8	8.7	11.0
Heat Exchanger	ThermoShell®				

3 Phase (400V 50Hz)					
4.9 / 4.1 / 4.1	6.0 / 4.6 / 4.6	7.6 / 6.0 / 6.0	10.0 / 7.0 / 7.0	11.0 / 8.0 / 8.0	13.0 / 9.5 / 9.5
ThermoShell®					

Water

Water Flow (l/sec)	0.22	0.28	0.34	0.50	0.61
Water Pressure Drop (kPa/psi)	27.6 / 4	27.6 / 4	41 / 6	70 / 10	41 / 6
Water Connections (ø mm / BSP)	13 / ½"	13 / ½"	13 / ½"	19 / ¾"	19 / ¾"

0.75	0.88	1.06	1.26	1.53	1.63
55 / 8	69 / 10	83 / 12	34 / 5	48 / 7	55 / 8
19 / ¾"	19 / ¾"	25 / 1"	25 / 1"	25 / 1"	25 / 1"

Dimensions

Size Dimensions W x H x D (mm)	928 x 355 x 788	928 x 355 x 788	1256 x 355 x 788	1213 x 415 x 781	1213 x 415 x 781
Weight (kg)	75	75	90	107	116

1283 x 425 x 781	1283 x 507 x 831	1513 x 507 x 831	1763 x 507 x 831	1998 x 507 x 831	2198 x 507 x 831
118	143	160	184	190	192

Notes: 1. Voltage fluctuation limits: Single Phase models 200-252 V.a.c.

2. Nominal Cooling Capacity at AS/NZS 3823.1.3 conditions:

Entering Water Temperature 30°C; Entering Air Temperature 27°C D.B., 19°C W.B.

3. Heating Capacity (HWP R version only) at AS/NZS 3823.1.3 conditions:

Entering Water Temperature 21°C; Entering Air Temperature 21°C D.B.

4. SPL measured to JIS 8616 (1 m from source) at nominal supply air flow, with 1 m insulated duct.

5. Pressure Drops based on nominal water flow.

6. Reverse Cycle Series.

7. EER/AEER based on reverse cycle series

Materials and specifications subject to change without notice due to the manufacturer's ongoing research and development programme.

# Standard Range HWP Specifications

Horizontal-Single Phase



# Standard Range HWP Specifications

Horizontal-Three Phase



Model

HWP 36    HWP 48    HWP 59    HWP 79    HWP 98

HWP 118    HWP 142    HWP 172    HWP 192    HWP 255    HWP 275    HWP 370    HWP 445

Capacity (Range) kW\*

Nominal Cooling Capacity (kW) <sup>2</sup>	3.5	4.4	5.9	8.1	9.9
Net Cooling Capacity (kW)	3.4	4.3	5.8	7.9	9.8
Efficiency Cooling (EER/AEER) <sup>7</sup>	3.64 / 3.61	3.64 / 3.62	3.61 / 3.60	3.71 / 3.70	3.77 / 3.76
Heating Capacity (kW) <sup>3</sup>	3.7	4.6	5.4	8.9	11.1
Efficiency Heating (COP/ACOP)	3.82 / 3.79	3.66 / 3.64	3.62 / 3.61	4.18 / 4.16	4.22 / 4.21
Electric Heat Option (kW)	2	2	3	4	4

12.2	14.7	18.5	21.2	25.5	27.5	36.6	44.5
11.9	14.1	17.4	19.9	24.7	26.9	34.65	42.2
3.84 / 3.83	3.80 / 3.79	4.24 / 4.22	4.11 / 4.09	4.29 / 4.28	4.23 / 4.22	3.71 / 3.70	3.41 / 3.41
11.9	14.8	16.4	18.6	23.0	24.6	34.9	42.2
3.80 / 3.79	4.10 / 4.09	4.10 / 4.09	4.23 / 4.21	4.31 / 4.30	4.13 / 4.12	3.86 / 3.85	3.64 / 3.64
6	6	9	9	12	12	18	24

Airflow

Nominal Supply Air Flow (l/sec)	190	230	320	500	560
	620	775	1015	1160	1220

1900	2300
620	775

Noise Data<sup>4</sup>

Sound Pressure Level (db(a))	37	37	43	43	43
	48	48	48	45	47

55	63	64
48	48	48

Power

Power Supply <sup>1</sup>	Single Phase (230 - 240V 50Hz)				
Run Amps at Nominal Condition <sup>6</sup>	4.2	5.2	7.6	9.1	11.5
Heat Exchanger	ThermoShell®				

3 Phase (400V 50Hz)							
6.1 / 3.7 / 4.2	7.9 / 4.6 / 4.5	10.2 / 6.0 / 5.9	12.0 / 7.0 / 7.0	13.5 / 8.0 / 8.0	15.0 / 9.5 / 9.5	18.38 / 18.38 / 14.2	22.98 / 22.98 / 22.98
ThermoShell®							Tube / Tube

Water

Water Flow (l/sec)	0.22	0.28	0.34	0.50	0.61
Water Pressure Drop (kPa/psi)	27.6 / 4	27.6 / 4	41 / 6	70 / 10	41 / 6
Water Connections (ø mm / BSP)	13 / ½"	13 / ½"	13 / ½"	19 / ¾"	19 / ¾"

0.75	0.88	1.06	1.26	1.53	1.63	2.0	2.25
55 / 8	69 / 10	83 / 12	34 / 5	48 / 7	55 / 8	48.3 / 7	34.5 / 5
19 / ¾"	19 / ¾"	25 / 1"	25 / 1"	25 / 1"	25 / 1"	32 / 1¼"	32 / 1¼"

Dimensions

Size Dimensions W x H x D (mm)	928 x 355 x 788	928 x 355 x 788	1256 x 355 x 788	1213 x 415 x 721	1213 x 415 x 721
Weight (kg)	70	70	85	102	112

1283x425x721	1283x507x771	1513x507x771	1763x507x771	1998x507x771	2198x507x771	2050x655x875	2280x673x875
117	141	153	177	190	199	290	385

Notes: 1. Voltage fluctuation limits: Single Phase models 200-252 V.a.c.  
2. Nominal Cooling Capacity at AS/NZS 3823.1.3 conditions:  
Entering Water Temperature 30°C; Entering Air Temperature 21°C D.B.

3. Heating Capacity (HWP R version only) at AS/NZS 3823.1.3 conditions:  
Entering Water Temperature 21°C; Entering Air Temperature 21°C D.B.  
4. SPL measured to JIS 8616 (1 m from source) at nominal supply air flow,  
with 1 m insulated duct.

5. Pressure Drops based on nominal water flow.  
6. Reverse Cycle Series.

Materials and specifications subject to change without notice due to the  
manufacturer's ongoing research and development programme.

# CWP Range Specifications

Vertical-Single Phase



CWP 63 ~ 1030



Single Phase

Model

CWP 63 CWP 83 CWP 96 CWP 109 CWP 132

Capacity (Range) kW\*

Nominal Cooling Capacity (kW) <sup>2</sup>	6.27	8.31	9.63	10.9	13.14
Net Cooling Capacity (kW)	6.14	8.09	9.37	10.58	12.77
Efficiency Cooling (EER/AEER) <sup>7</sup>	3.53 / 3.51	3.64 / 3.58	3.56 / 3.55	3.53 / 3.51	3.52 / 3.51
Heating Capacity (kW) <sup>3</sup>	6.63	8.34	9.58	10.27	11.9
Efficiency Heating (COP/ACOP)	4.31 / 4.28	4.32 / 4.27	4.06 / 4.00	3.89 / 3.80	3.86 / 3.80
Electric Heat Option (kW)	2.5	3	4	4.5	5.5

Airflow

Nominal Supply Air Flow (l/sec)	380	490	570	600	770
	600	770	920	1210	1535

10.87	13.14	17.8	21.74	26.28	37.44	44.7	57.5	89.0	101.6
10.58	12.77	17.25	21.16	25.54	36.13	42.9	55.7	86.9	94.5
3.53 / 3.51	3.52 / 3.51	3.58 / 3.52	3.51 / 3.50	3.7 / 3.6	3.65 / 3.64	3.37 / 3.36	3.72 / 3.65	3.45 / 3.22	2.94 / 2.92
10.27	11.9	16.41	20.54	23.8	35.5	46.6	54.9	84.4	98.6
3.89 / 3.80	3.86 / 3.80	3.98 / 3.97	4.10 / 4.00	3.84 / 3.78	4.06 / 4.05	3.99 / 3.98	4.0 / 3.90	3.59 / 3.58	3.31 / 3.30
4.5	5.5	6.5	8	10	15	21	22.5	34.5	39

Noise Data<sup>4</sup>

Sound Pressure Level (db(a))	55.1	60.4	63.4	63.4	58.6
	63.4	58.6	62.9	69.3	66.3

63.4	58.6	62.9	69.3	66.3	72.3	69.3	69.3	82	81

Power

Power Supply <sup>1</sup>	Single Phase (230 - 240V 50Hz)				
Run Amps at Nominal Condition <sup>6</sup>	7.5	9.7	11.4	15.3	16.0
Heat Exchanger	Tube / Tube				

3 Phase (400V 50Hz)					
5.8 / 4.5 / 4.4	6.0 / 5.7 / 5.7	8.2 / 8.0 / 8.0	10.2 / 10.2 / 10	12.0 / 11.4 / 11.4	16.7 / 16.3 / 16.3
Tube / Tube					22.3 / 21.9 / 22.1

Water

Water Flow (l/sec)	0.42	0.5	0.58	0.67	0.8
Water Pressure Drop (kPa/psi)	20.7 / 3	27.6 / 4	34.5 / 5	27.6 / 4	41.4 / 6
Water Connections (ø mm / BSP)	19 / ¾"	25 / 1"	25 / 1"	25 / 1"	32 / 1¼"

0.67	0.8	1.08	1.34	1.60	2.27	2.6	3.4	4.9	5.7
27.6 / 4	41.4 / 6	34.5 / 5	27.6 / 4	27.6 / 4	27.6 / 4	27.6 / 4	27.6 / 4	34.5 / 5	31.05 / 4.5
25 / 1"	32 / 1¼"	32 / 1¼"	38 / 1½"	38 / 1½"	51 / 2"	51 / 2"	51 / 2"	64 / 2½"	76 / 3"

Dimensions

Size Dimensions W x H x D (mm)	740 x 1430 x 650	740 x 1465 x 650	740 x 1465 x 650	740 x 1465 x 650	855 x 1400 x 780
Weight (kg)	150	170	170	176	216

740 x 1465 x 650	855 x 1400 x 780	855 x 1400 x 780	1320 x 1490 x 1035	1520 x 1490 x 1035	1520 x 1745 x 1035	2070 x 1845 x 1090	2070 x 2100 x 1090	1990 x 1905 x 1160	2320 x 2225 x 1365
176	216	226	330	460	530	655	770	795	1140

Notes: 1. Voltage fluctuation limits: Single Phase models 200-252 V.a.c.

2. Nominal Cooling Capacity at AS/NZS 3823.1.3 conditions:

Entering Water Temperature 30°C; Entering Air Temperature 27°C D.B., 19°C W.B.

3. Heating Capacity (CWP R version only) at AS/NZS 3823.1.3 conditions:

Entering Water Temperature 21°C; Entering Air Temperature 21°C D.B.

4. SPL measured to JIS 8616 (1 m from source) at nominal supply air flow, with 1 m insulated duct.

5. Pressure Drops based on nominal water flow.

6. Reverse Cycle Series.

7. EER/AEER based on reverse cycle series

Materials and specifications subject to change without notice due to the manufacturer's ongoing research and development programme.



CWP 63 ~ 1030



[temperzone.com](http://temperzone.com)



#### Australia

[ausales@temperzone.com](mailto:ausales@temperzone.com)

#### New Zealand

[nzsales@temperzone.com](mailto:nzsales@temperzone.com)

#### Singapore

[sales@temperzone.com.sg](mailto:sales@temperzone.com.sg)

The specifications of this catalogue may change without prior notice to allow Temperzone to incorporate the latest innovations for its customers. The information contained in the catalogue is merely informative. Temperzone declines any responsibility in the broadest sense, for damage direct or indirect, arising from the use and / or interpretation of the recommendations in this catalogue.

TEM01/26

#### Australia

Sydney	02 – 8822 5700
Adelaide	08 – 8115 2111
Brisbane	07 – 3308 8333
Melbourne	03 – 8769 7600

#### Distributors

Newcastle	02 – 4962 1155
Perth	08 – 6399 5900
Launceston	03 – 6331 4209

#### New Zealand

Auckland	09 – 279 5250
Hamilton	07 – 839 2705
Wellington	04 – 569 3262
Christchurch	03 – 379 3216

#### Asia

Singapore	65 – 6733 4292
Shanghai	21 – 5648 2078

