




econex
nex gen R32 Inverter

AIR COOLED

Econex Packaged Units

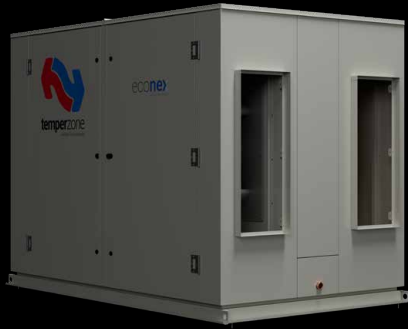

temperzone
climate innovations





Scan to watch
product video

Econex, providing
leading efficiency
and sustainability

● Heating Capacity
26.9kW - 88.2kW


● Cooling Capacity
25.4kW - 88.9kW

econex
nex gen R32 inverter



Econex Packaged systems offer a lower GWP solution with superior efficiency.

From light to large commercial, Temperzone can provide versatile air-cooled packaged solutions for your buildings.

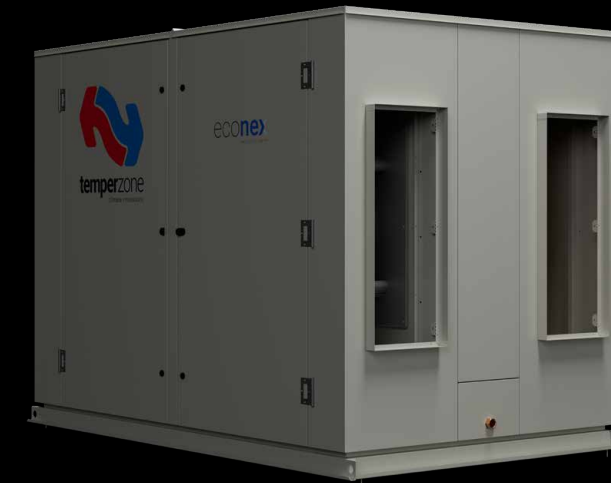

Energy efficient comfort control

With the use of an inverter compressor technology the Econex Packaged unit range provides a precise load variation response and superior part load performance for closer comfort control and higher energy efficiency.

71–81% reduction in GWP

Utilising R32 Refrigerant, Temperzone's Econex Packaged units enables a 71–81% reduction of Global Warming Potential (GWP) per kW of cooling when compared to R410a units. Temperzone aspires to lead the commercial HVAC industry in focusing to reduce the global warming potential of air conditioning products.

Features

econex

nex gen R32 inverter

Econex Packaged units
(25.4kW - 88.9kW)



Inverter Compressor
Closely matching the performance to the load requirements during all seasons



EC Plug Fan
High static plug fans that can be externally controlled via 0~10VDC or BMS command



EC Condenser Fans
EC Condenser fans provide greater efficiency and control with soft starting and low air noise



Dual EEV Systems
Dual EEV offers optimum control of superheat for outstanding comfort and humidity control



Intelligent Unit Controller
Ensures the unit runs at its optimum efficiency and provides system operation data



Wide Temperature Operating Range
From -15°C to +52°C* ambient



Corrosion Resistant Design
Marine grade surface protection and epoxy coated coil protection



Economy Cycle
Optional economy cycle and fresh air for reduced power consumption in shoulder seasons



Low GWP Refrigerant
R32 refrigerant has a significantly lower GWP than R410A

- > Louvred guards
- > 3rd party connectivity
- > Filter rails
- > Inbuilt Service GPO
- > Easy maintenance access
- > Foil face polyethylene insulation

* OPA 970 from -10°C +50°C



New Compact Design
Reduced unit footprints for easy and cost effective unit placement



New Intelligent De-ice
Quick & Efficient de-ice resulting in increased heating performance



BMS
BACnet™ or Modbus via RS485 (or TCP/IP option)
*BACnet is optional accessory




Lower Global Warming Potential Air Conditioning

Lower global warming potential

With a smaller refrigerant charge and a GWP of 675*, OPA Econex R32 refrigerant units result in a 71-81% reduction in overall GWP per kW of cooling or heating when compared to R410A systems (GWP 2088*).

Reducing future costs


As higher GWP refrigerants face increasing cost due to emissions tax levies the specification of R32 systems will represent a significant reduction in the future costs associated with owning and maintaining these systems.

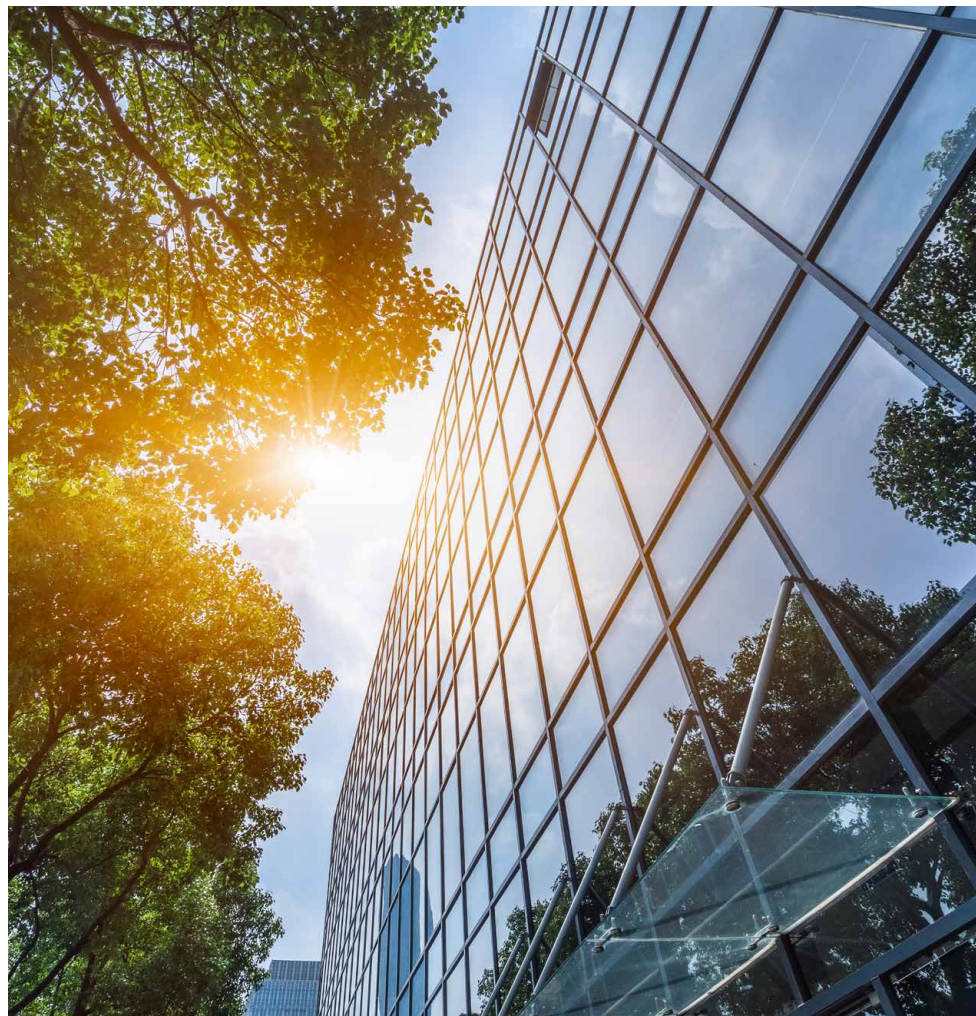


*AR4 Standard

Potential Carbon Emissions attributed to refrigerant (CO₂ Tonnes)


- Older Model
- Econex

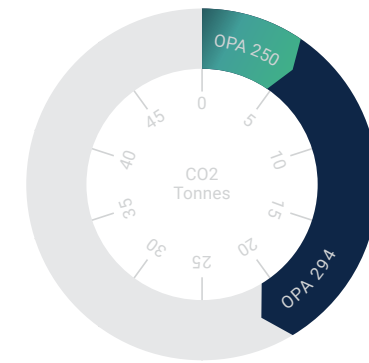


Reduced
74%
CO₂ Tonnes

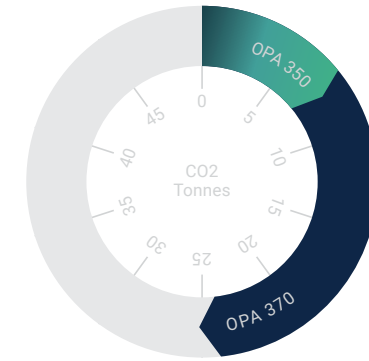


Reduced
71%
CO₂ Tonnes

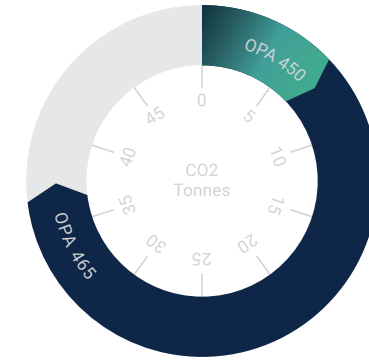

Reduced
81%
CO₂ Tonnes

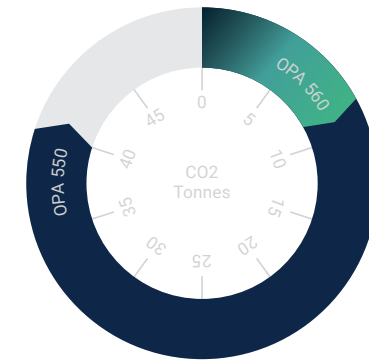

Reduced
77%
CO₂ Tonnes

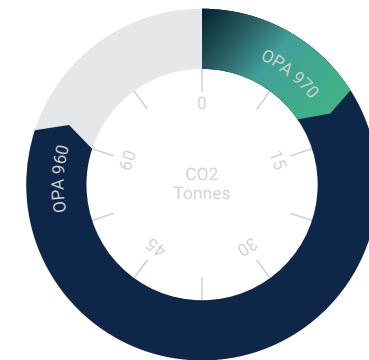


Reduced
78%
CO₂ Tonnes

Close Comfort Control

Econex Inverter compressor technology delivers precise control of indoor air temperatures for superior year round comfort with leading energy efficiency.

Improved Comfort Control

- Inverter
- Fixed Speed
- Set Point Temperature

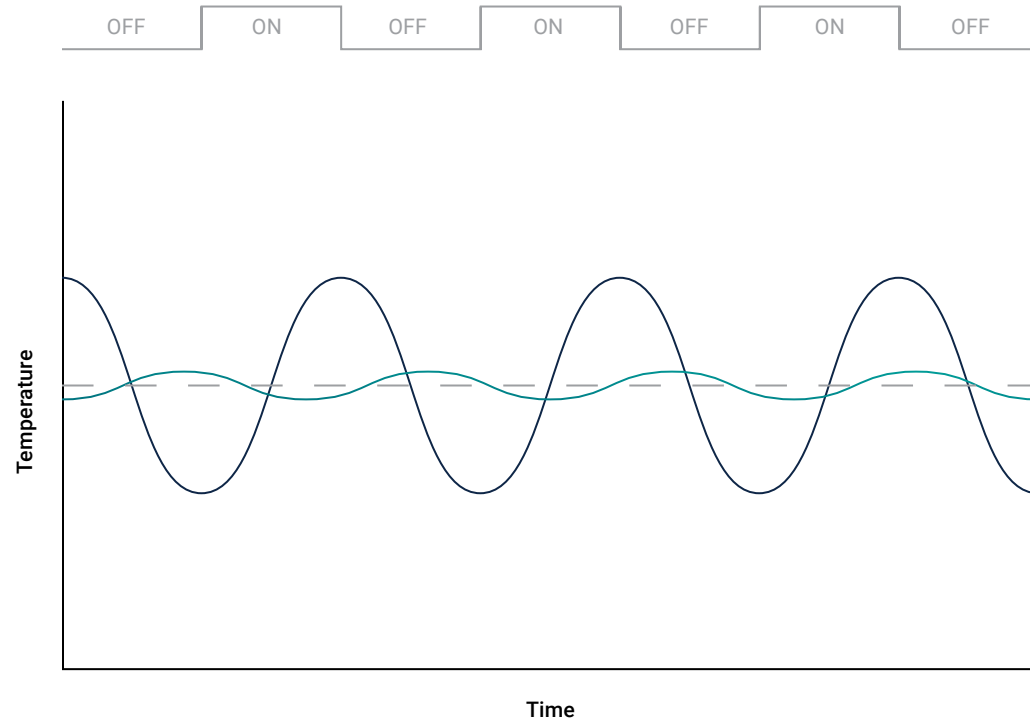

Inverter Comfort Control


Fixed speed air conditioners are single speed on/off systems. Once the desired temperature is reached, they turn off, turning back on only when the temperature drops below or rises above a set level. This cycling between full or no capacity causes unnecessary waste of electricity and doesn't maintain a constant room temperature.

The use of variable capacity inverter compressors allow a precise load variation response for superior temperature control. The use of electronic expansion valves and variable speed indoor and outdoor fans further allows a more effective, and efficient, response to varying load conditions.

Inverter Compressors

Econex inverter compressors only use the amount of energy to suit the operating condition maximising your SEER performance.

- › Soft starting, using much less power at start up.
- › Matching capacity to load avoids temperature fluctuation and reduces energy input power.
- › Full inverter compressor range from 16-100% compressor speed.
- › Reduced amount of start/stop for long life operation.

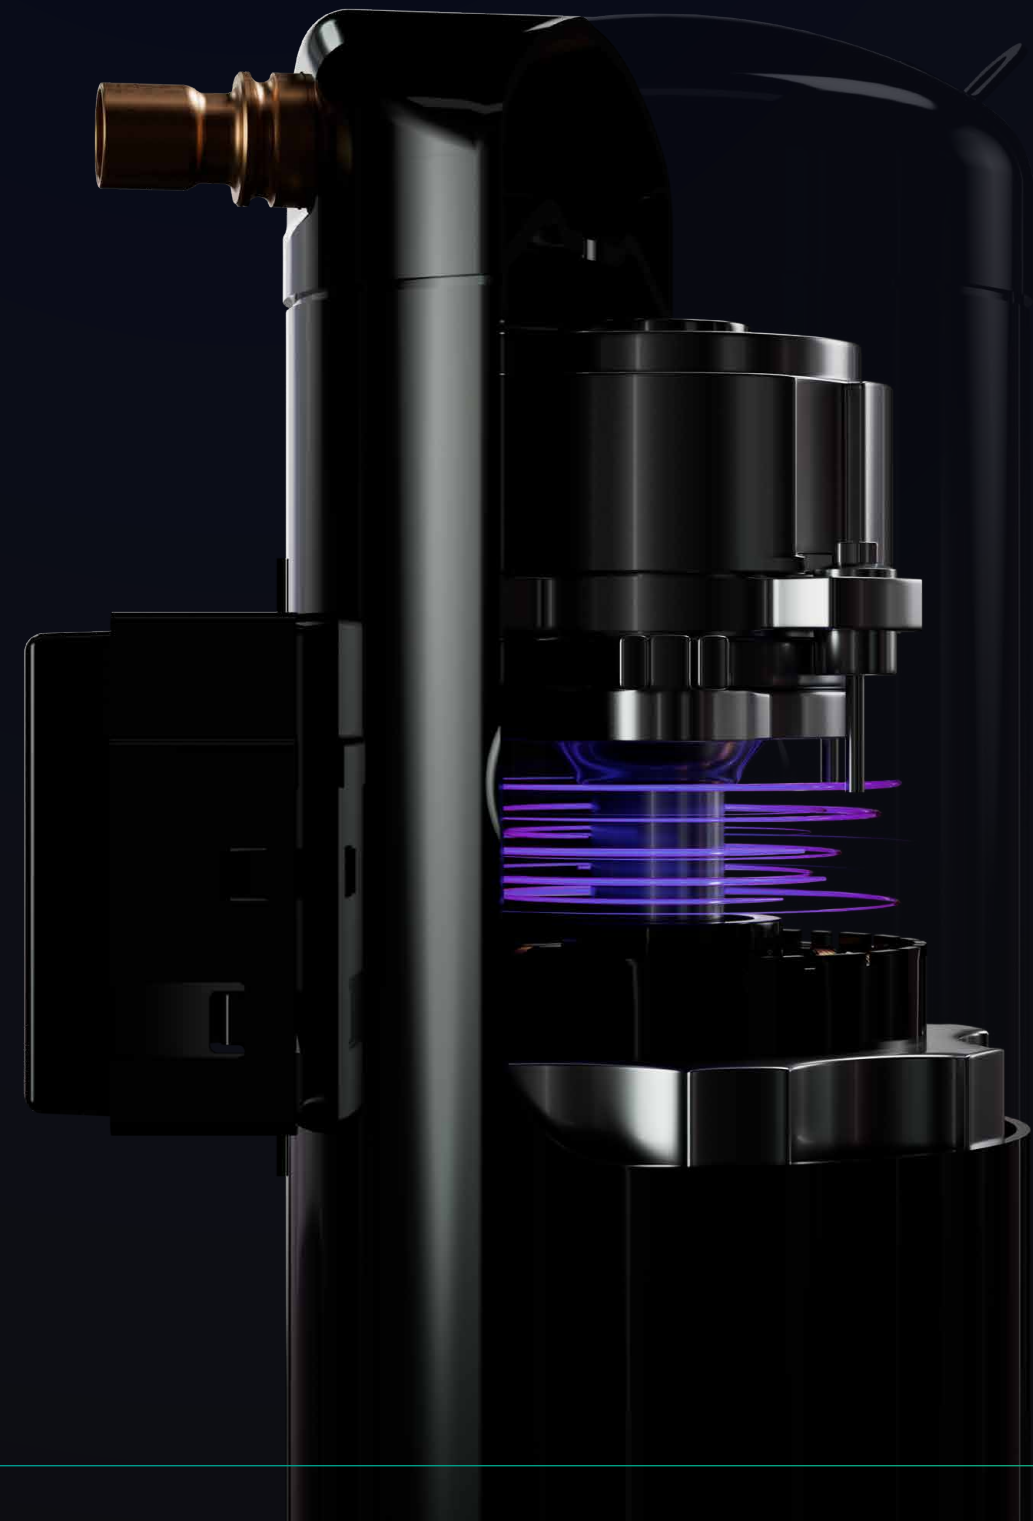


Seasonal Energy Efficiency (SEER)

Superior seasonal performance with Econex Inverter technology.

Econex OPA 560 Variable Speed vs Fix Speed – Commercial Cold Zone

- EER Econex Variable Speed
- EER Fixed Speed
- Climate Bin Hours – Cold Zone

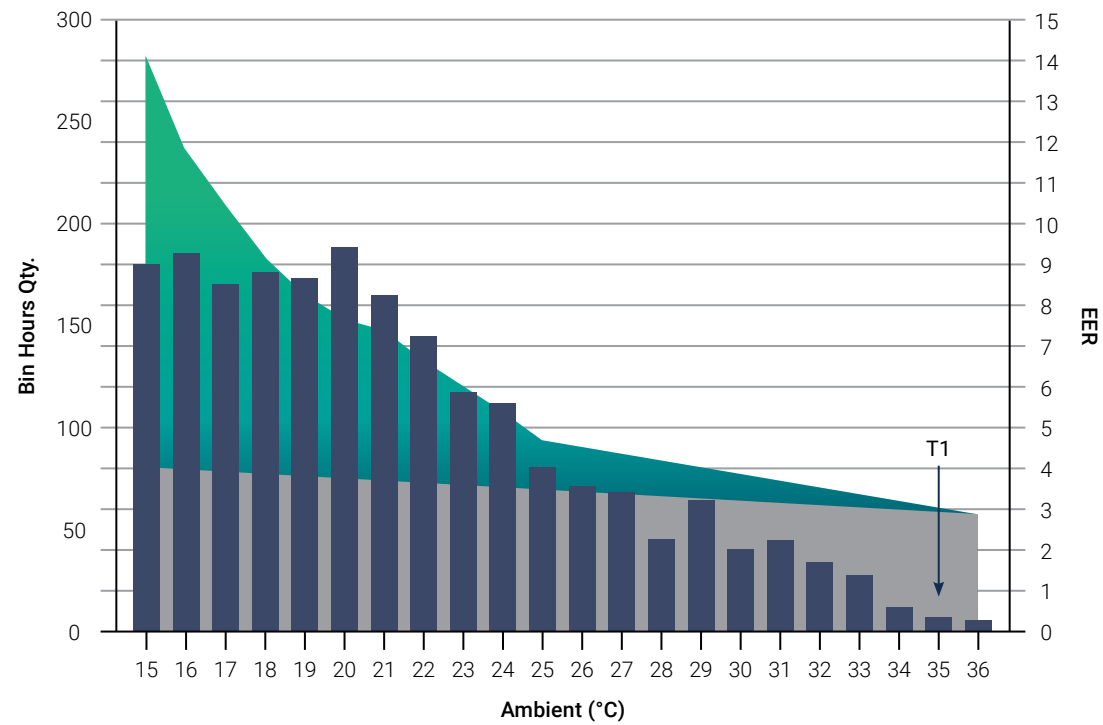

Seasonal energy efficiency requires testing of units at “part load”, as well as traditional T1 & H1 conditions. Data is then mapped against the bin operating hours for the corresponding temperate zone to determine seasonal energy performance.

- › Units operate the majority of the time at part load.
- › Inverter compressors are more efficient at part load.
- › Variable speed fans are more efficient at part load.



MEPS EER condition (T1) is a single point where units rarely operate. SEER goes a step further to estimate real use, overlaying the “bin hours” shows actual efficiency is better for variable speed systems.

Compared to the same capacity fixed speed unit, the Econex OPA 560 considerably increases in efficiency (EER) as the ambient reduces, while the fixed speeds system efficiency remains relatively unchanged.

Total Cooling Seasonal Performance Factor – Commercial Cold Zone

The Econex range, when compared to the same capacity fixed speed units, has considerably higher seasonal energy efficiency factors.



- Fixed Speed
- Econex

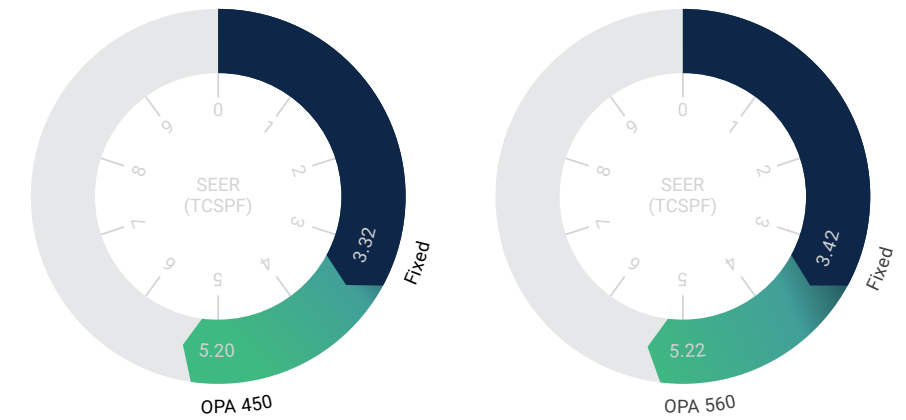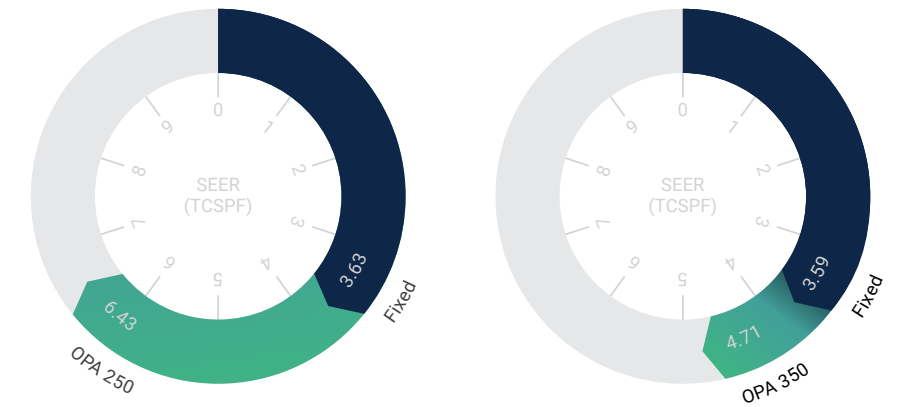

Annual Cooling kWh – Commercial Cold Zone

MEPS Seasonal performance energy usages for Econex range shows considerable energy savings (kWh) compared to fixed speed equivalents.

- Fixed Speed
- Econex

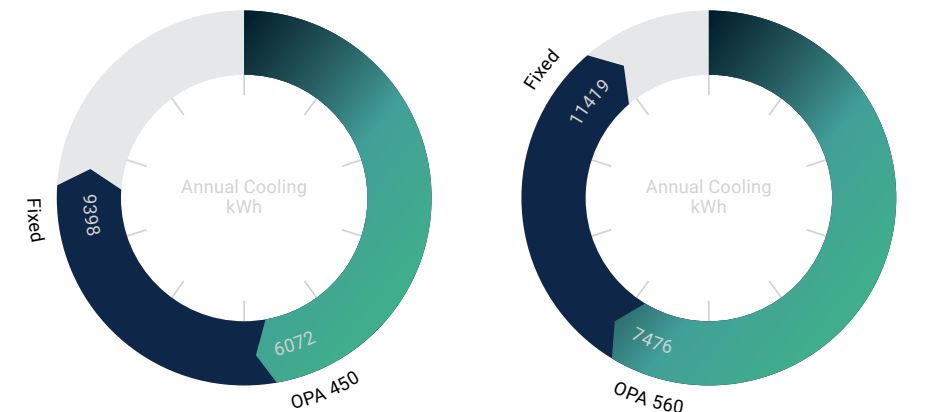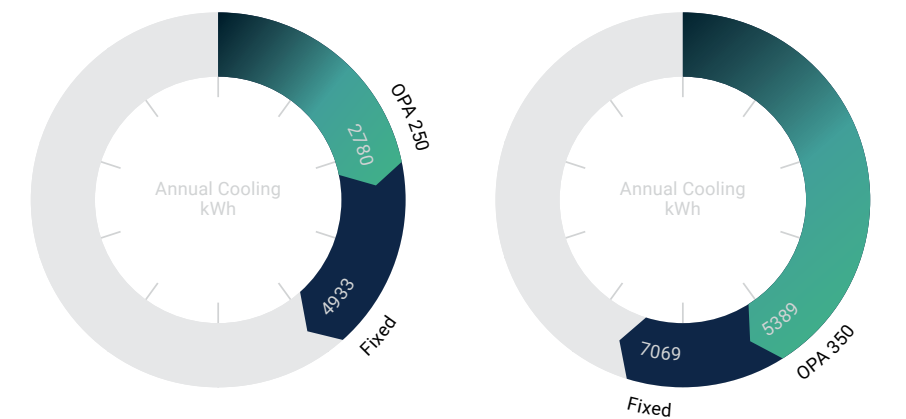


Ideal solution for office spaces



High Performance Design


Extra capacity with very wide heating and cooling ranges

For versatile specification, all R32 inverter packaged systems offer a very wide heating and cooling capacity range enabling reliable comfort at times of peak load and increased energy savings under low load conditions.

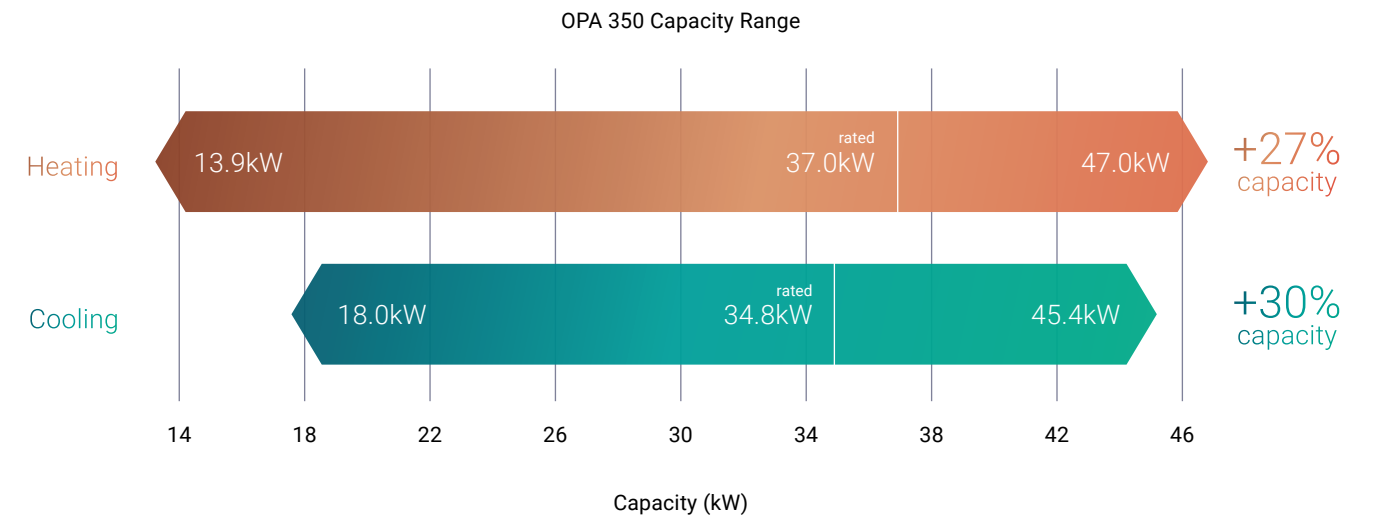

Extreme weather operation

Designed for the harshest conditions these R32 packaged units are designed to operate in ambient temperatures from -15°C to 52°C* to ensure you're always comfortable, whatever the weather. (*OPA 970 -10°C to 50°C)

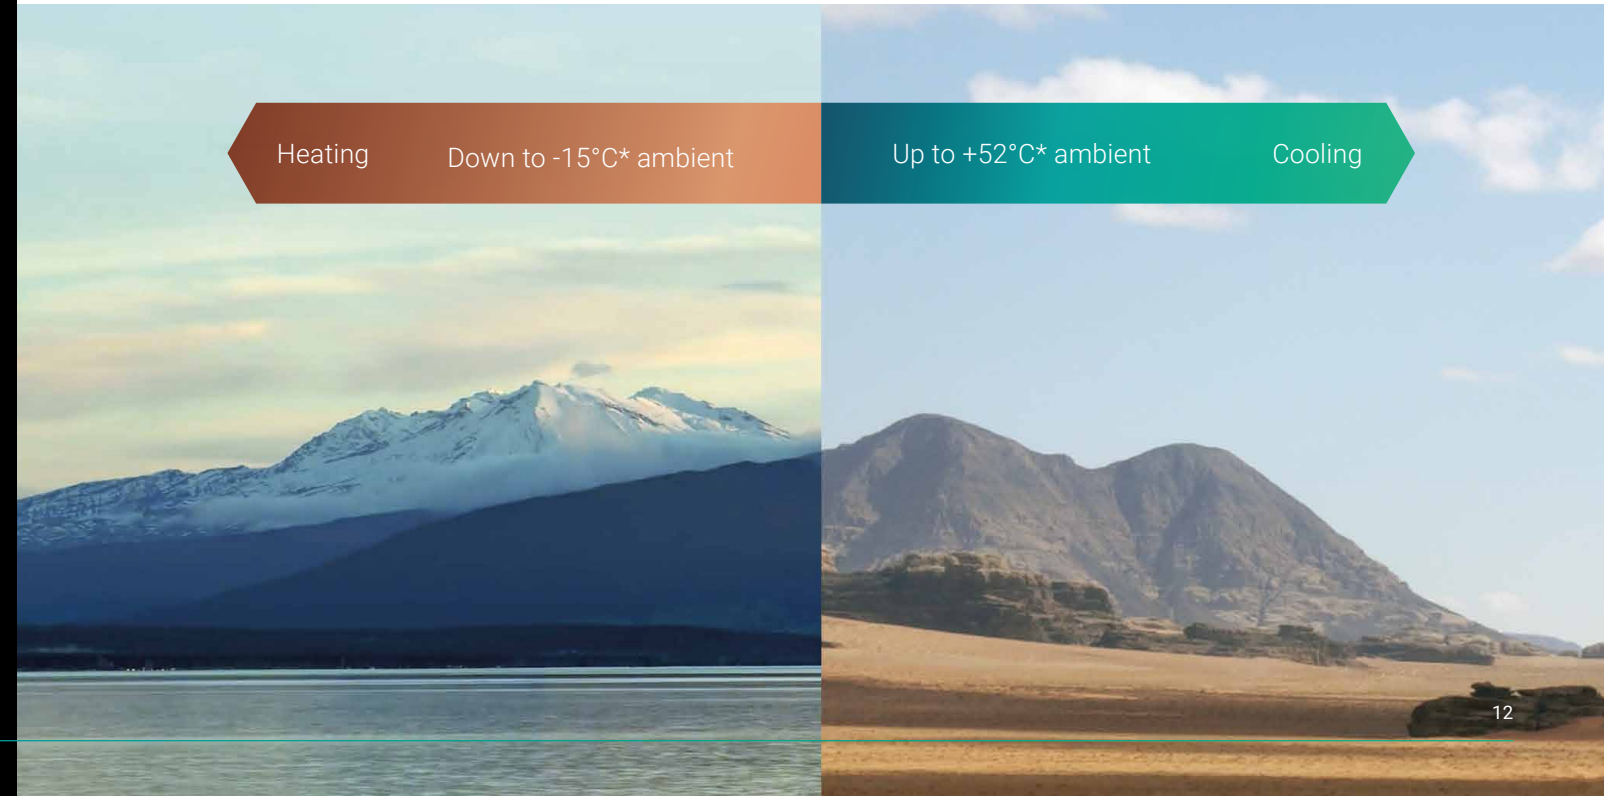


Energy Saving Technology

Intelligent system control technology offers leading energy efficiency with precision control of the air conditioners refrigeration system.


EC Fan Technology

Our high-efficiency EC fan motors are up to 50% more energy efficient than Belt drive or AC motor alternatives and enable quiet operation with slow ramp-up and no sudden noise changes. Achieve precise comfort with custom select fan speeds or continuously variable fan speed control.

- AC Motor
- EC Motor

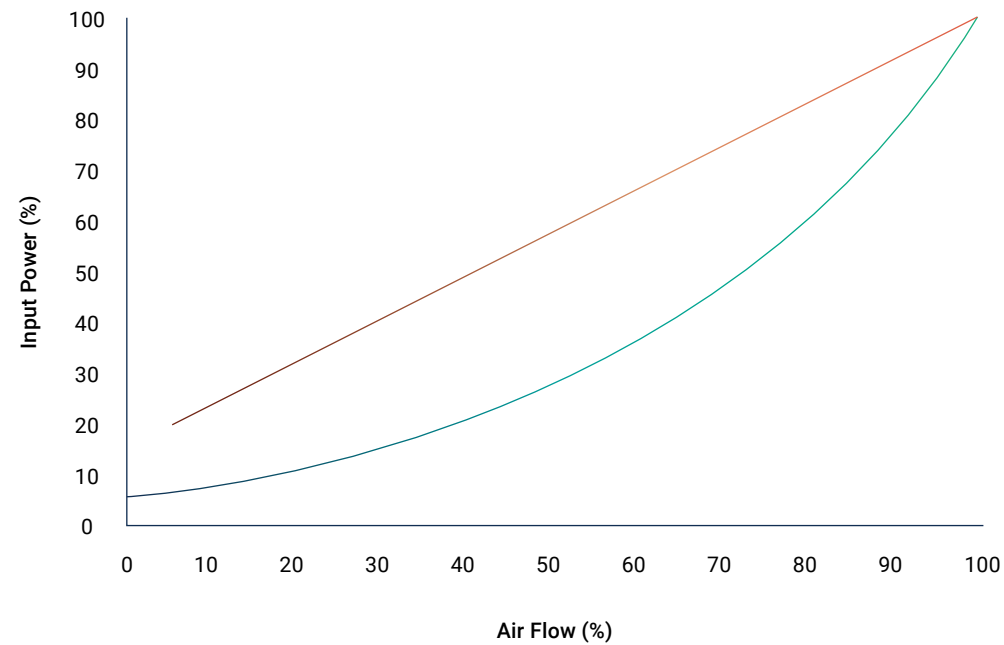

Ideal solution for open spaces

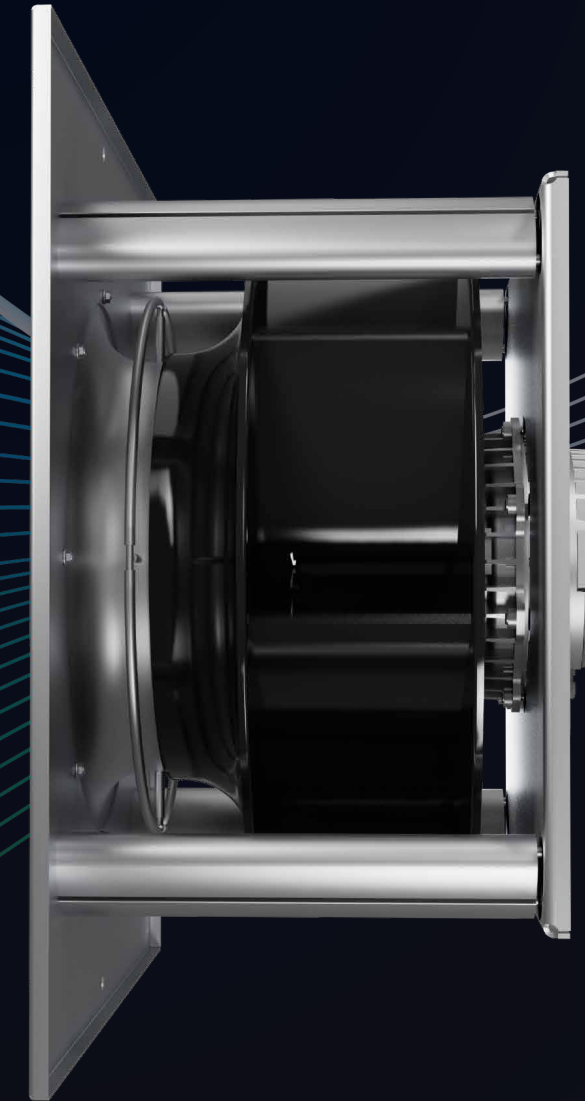

EC Plug Fans

EC Plug fans control airflow accurately and efficiently. Fan speed can also be controlled via external signals via input or Modbus.

- › Programmable for exact airflow.
- › High static pressure.
- › Enables variable airflow operation.
- › Longer motor life resulting from lower running temperatures.
- › Lower maintenance and commissioning costs.
- › Slow ramp up for quiet operation.
- › Longer bearing life due to soft start.

EC Condenser Fans

EC fans increase overall efficiency. Infinitely variable fan speed control means refrigeration efficiency can be optimised in all climatic conditions.


- › Up to 50% more efficient than AC fan technology.
- › High static pressure.
- › Minimised power consumption under optimised floating head pressure control.
- › Quiet operation mode.



Dual Electronic Expansion Valves (EEV)

Temperzone Econex dual EEV's allow optimum control of superheat at varying load. They also provide increased efficiencies by lowering head pressure and optimum feeding of heat exchanger coils. EEV's control liquid saturation over the coils, which in turn increases the opportunity to absorb energy.

- Accurator
- EEV

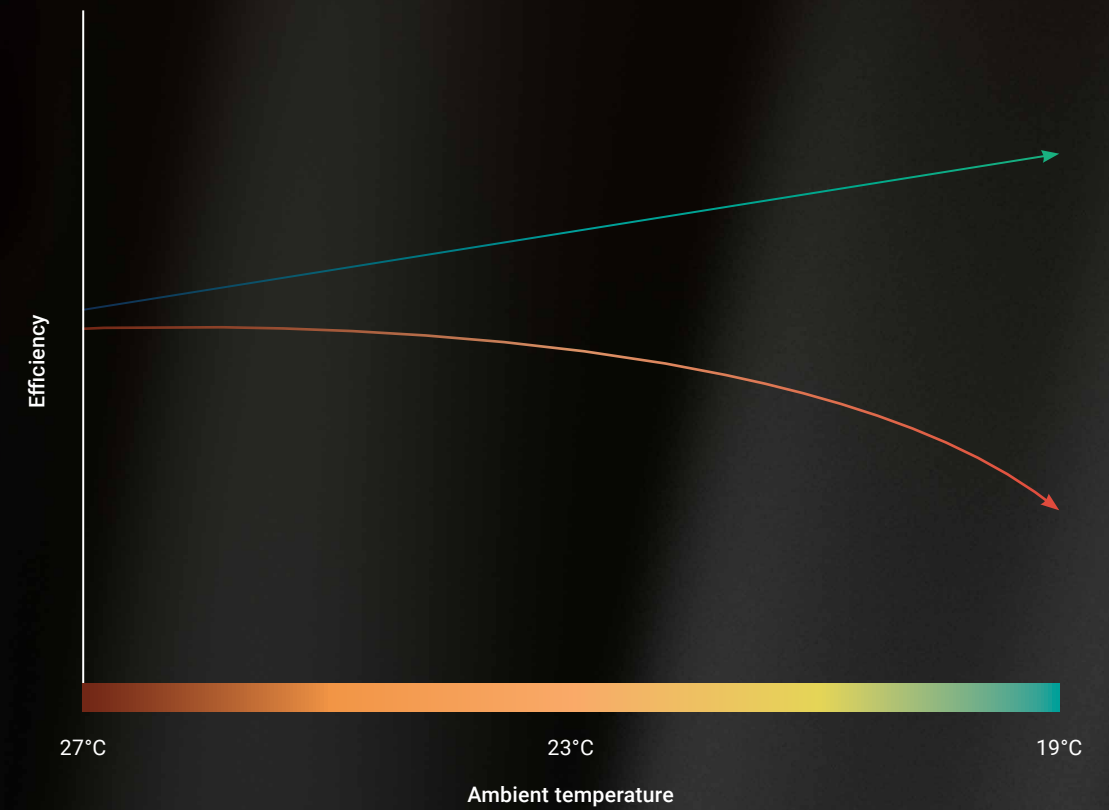


Benefits include:

- › EEVs enable improved efficiency and reduced operating costs at part-load conditions.
- › They also facilitate maximised energy savings during the shoulder seasons – periods in which air conditioning systems often run at part-load.
- › Fast and precise control of superheat.
- › Dual EEVs enables the individual control of each EEV and activate the unique temperzone Dry mode.

Advanced & Super Dry Mode

Econex offers superior levels of Dry Modes to suit your requirements.

- Super Dry Mode
- Advanced Dry Mode
- Standard Mode

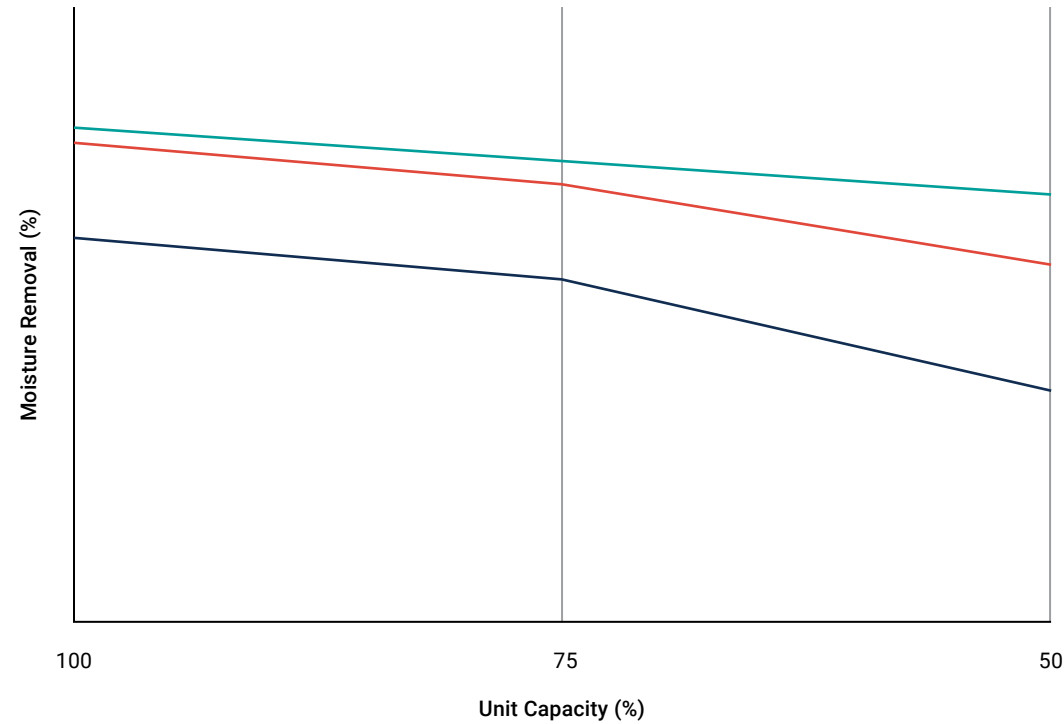

Advanced Dry Mode and Super Dry Mode can only be achieved by Temperzone Econex units as they utilise optimised Dual Electronic Refrigeration Valve control (IP protected) to achieve exceptional dehumidification performance across the units full operation range.

Advanced dry mode can provide de-humidification over a wide range of operating conditions and unit duty whilst the indoor fan speed can remain constant.

Super dry cooling mode requires the UC8 controller to vary the indoor fan speed. Under most operating conditions indoor fan speed will be equal to the speed requested by the thermostat or other controller. Only when the desired indoor coil temperature cannot be achieved by the dual electronic expansion valves alone then the controller will adjust the indoor fan speed to obtain de-humidification.

Intelligent De-ice

New intelligent de-ice enables improved heating performance in colder conditions. Optimised coil circuitry and new controller logic results in fast and more effective de-ice.

Econex de-ice is designed to support the full turn down of the compressor and de-ices from the top to the bottom of full height coil circuits. Utilising a highly balanced split circuit coil design prevents excess pressure drop as the refrigerant changes phase.

Allows:

- > Capacity during de-ice to be controlled to 10°C condensing temps.
- > Aim to melt ice, not evaporate water. Evaporating water requires 6.75 more energy than melting ice.
- > Econex de-ice at a low capacity which is more efficient, and takes similar time as traditional de-ice.
- > Operation is extended up to 50 minute intervals between de-ice cycles, up from 35 min.
- > Better capacity control allows better room temp control under part load conditions.




Durable Long Life Design

Econex units are designed to be highly durable and suited to the harshest environmental conditions.

Adaptive Valve Regulation

Temperzone's proprietary Adaptive Valve Regulation system (AVR) ensures that Temperzone inverter air conditioning systems run more efficiently and enjoy a longer operational life. AVR maximises efficiency in both heating and cooling cycles by regulating refrigerant flow capacity, allowing the system to maintain stability and efficiency over the full range of operating conditions.

- Starving (Traditional Underdamped)
- Ideal (AVR)
- Prolonged Flooding (Traditional Overdamped)

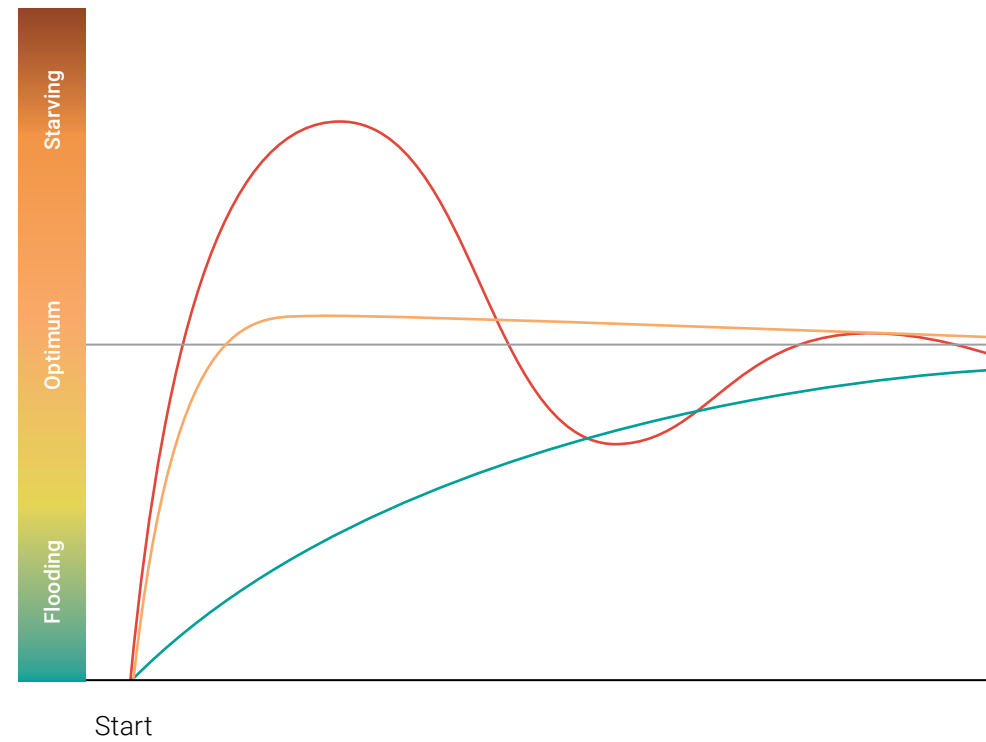

AVR also prevents:

- › Prolonged flooding (oil washed out of the system), which leads to seized bearings and compressor damage.
- › Improves Compressor Lifecycle.
- › Starving, which leads to HP/LP trips and reduced EER / Duty. Continuous starving leads to compressor motor overheat.

- 1 Epoxy coated coil protection for superior corrosion resistance
- 2 Marine grade pretreatment and polyester powder coated galvanised steel, inside and out
- 3 Louvre Guards for added protection against severe weather, UV damage to coils & accidental contact
- 4 Sloped outdoor section allows water from rain and de-ice to be drained from the unit
- 5 SKT coated screws provide a higher corrosion resistance than 316 stainless steel
- 6 Remove bungs to create positive pressure electrical compartment and clear dust
- 7 Closed cell foam insulation ensuring no particles are introduced into the air stream
- 8 Isolated compressor and electrical compartment for less noise and weatherproofing



Control Options

From advanced commercial controllers to stylish touch screen controllers, Temperzone has a control option to suit your space and application.

TZT-100

Temperzone's TZT-100 thermostat is an advanced controller suited to commercial environments. It delivers comprehensive control for your system not available with other thermostats.



Features


- Modes – cool / cool-dry / heat / auto-dry / auto
- Set airflow - auto / low / med / hi (customisable)
- Key board and temperature locks
- 7 Day programmable time clock
- Set temperature: 5°C to 50°C at 0.5°C increments
- Remote sensor inputs

- Programmable occupancy inputs
- On demand override count down timer up to 12hrs
- Filter monitor option (by hours)
- Continuous or Intermittent fan operation
- Connects to outdoor unit (UC8)

BMS Connectivity

Econex Packaged units can connect into a BMS for control and operation.

- › Through the outdoor unit via the UC8's Modbus/RS485 port with multi-unit control capability.
- › Up to 99 units can be connected on a common RS485 bus in daisy chain design.
- › Daisy chain wiring saves on amount of wiring and required labour time.
- › BMS communication cable (2-wire shielded).
- › Maximum cable length of 1000m.

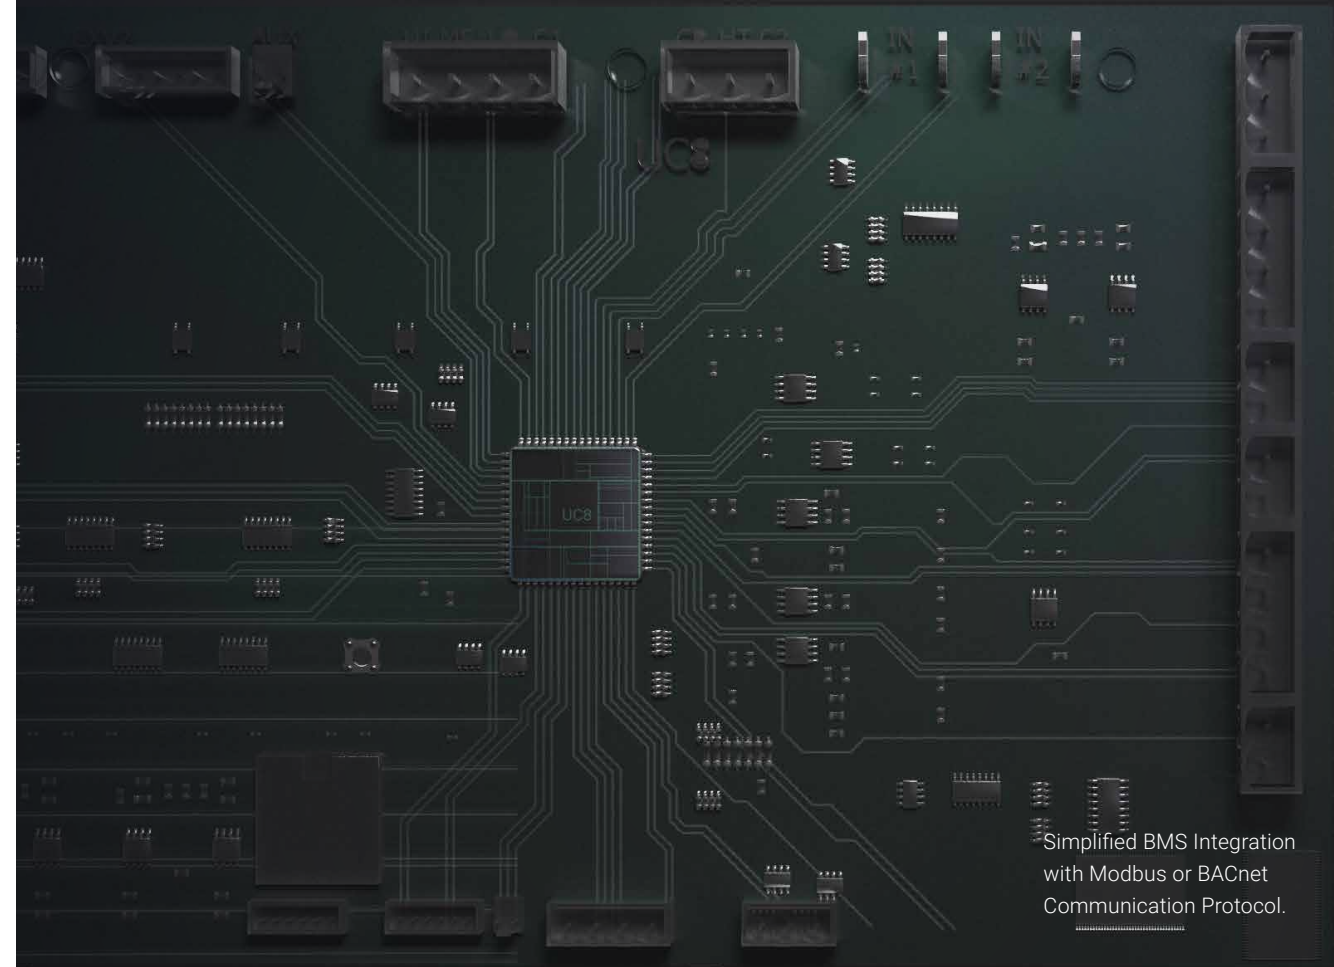

Simplified BMS Integration with Modbus or BACnet Communication Protocol.




Minimised Footprint


Unit footprints have been minimised to reduce associated installation costs and accommodate confined spaces.

As the next generation product the Econex footprint sizes have been reduced considerably. This amounts to between 20% to 22% for the Econex OPA 350, OPA 450 and OPA 560, when compared to the previous generation product.


**20% to 22%
Footprint Reduction**



OPA 370



OPA 465



OPA 550



Wiring is made easy and convenient with new client wiring terminals.

Convenient Client Wiring Terminals

Installer electrical access has been improved with connections more easily accessed through customer terminals. Units are fully wired and the main power supply along with communication connections can be wired directly within the terminal.




Easy Installation & Maintenance

While simplicity of design enables quick and easy installation, in-built functionalities mean that after-sales operation and servicing is also a time-efficient process.

- 1** Removable access cover for inspection of outdoor coil headers and sensors
- 2** Easy wiring terminal connections for communications and mains wiring
- 3** Socket Outlet (SO) in electrical panel for single phase appliances
- 4** Generic mechanical and electrical parts for easy servicing and replacement
- 5** Optional drain cups with spigots for PVC pipe connections for remote drainage
- 6** Access covers for indoor coil inspection and draintray cleaning
- 7** UC8 7-segment fault display
In-built electronic safeties
Adjustable indoor airflow
- 8** Easy access hinged maintenance service doors with door stays
- 9** Deep and wide Indoor coil draintray with brass hex socket removal connection
- 10** Four 16mm unit mounting holes in cross channels
- 11** Easy access design with spacious access to refrigerant components for servicing
- 12** Easy filter access through supply air chamber hinged service door



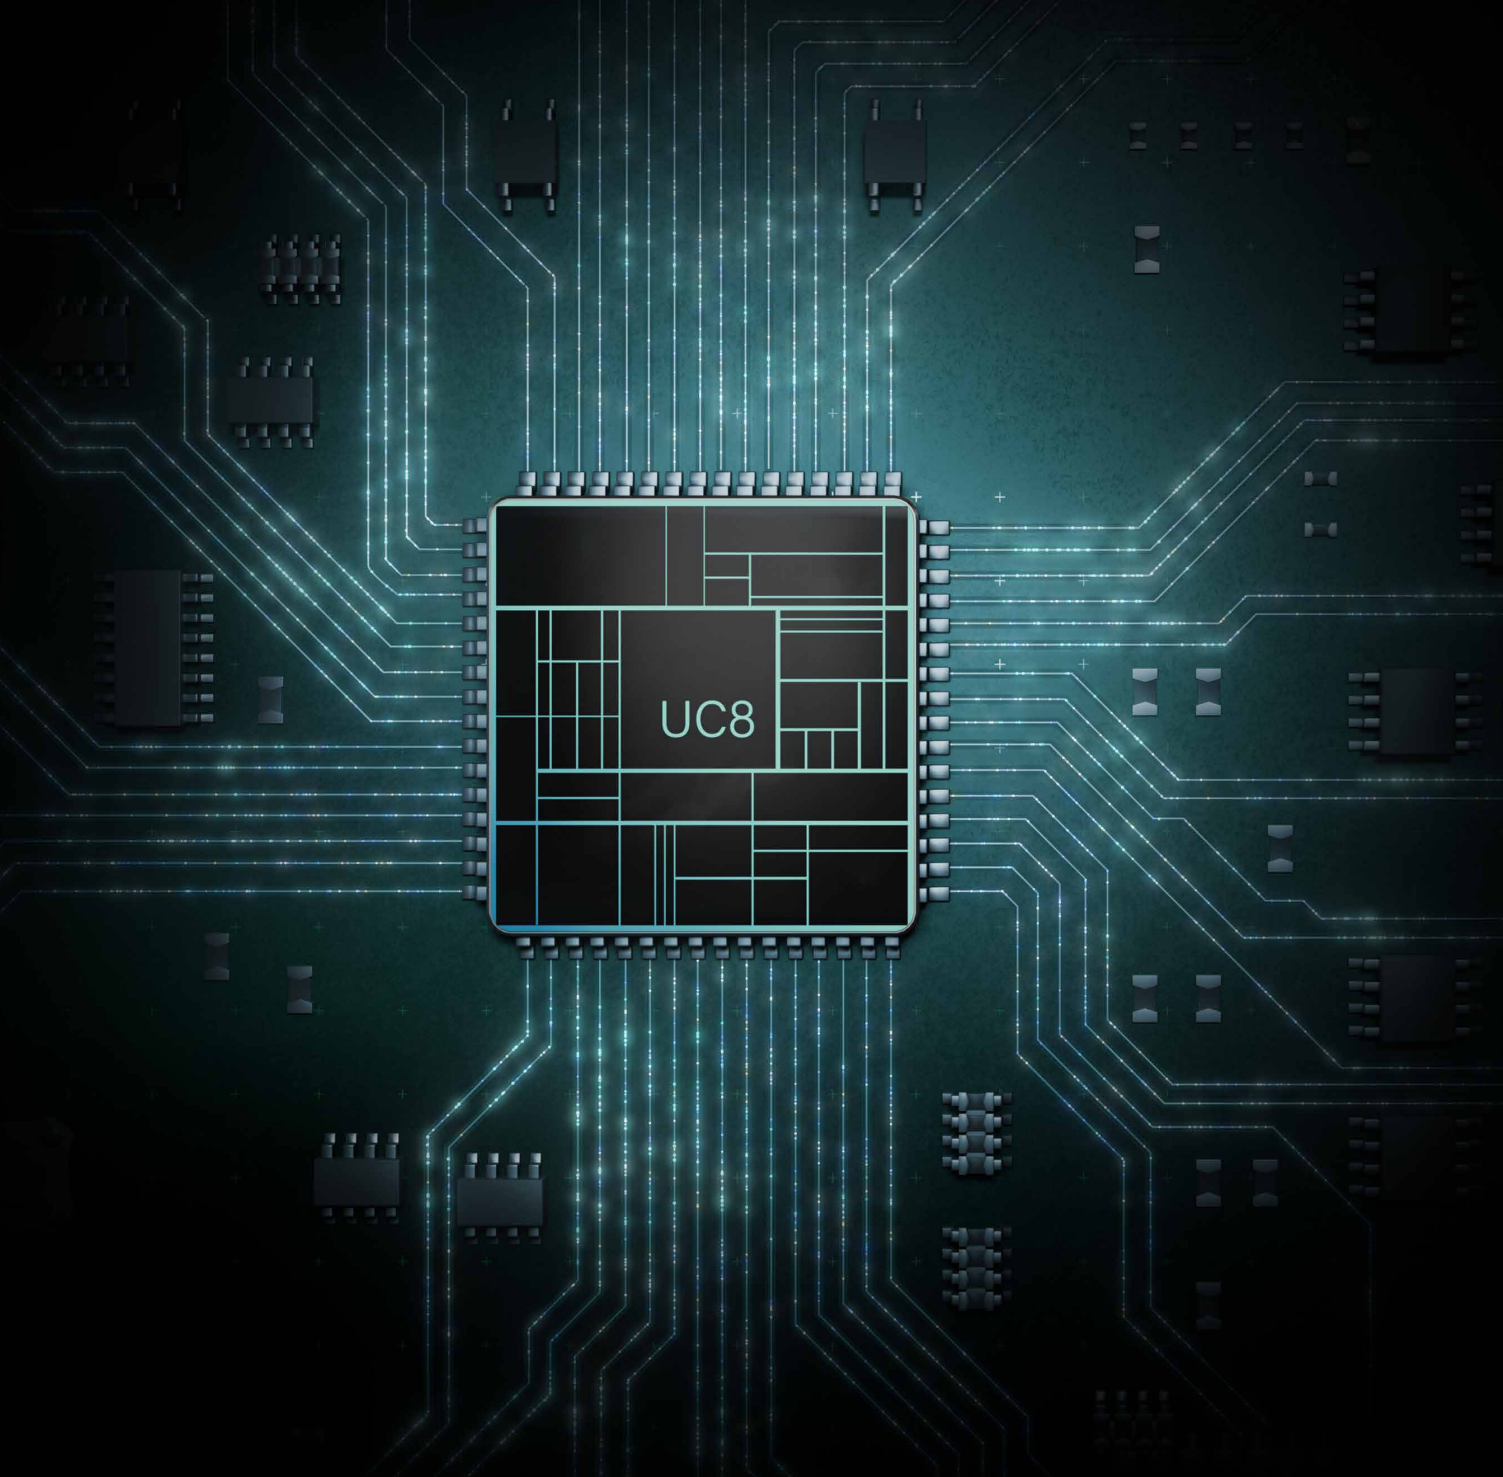

UC8 intelligent unit controller

Intelligent unit controller (UC8) has been designed to deliver efficient and precise system control under all conditions. Intelligent control of outdoor fan speed, coil temperatures, inverter compressor speed and advanced refrigeration safeties.

WiFi Service Utility Tool

WiFi Service Utility (WSU) is a portable control interface that plugs directly into the UC8 board on a Temperzone Air Conditioning Unit. It allows you to monitor a wide range of operational parameters, view fault logs and even take control of the unit. It has its own WiFi network built in and the control and diagnostics are done wirelessly from a smartphone, tablet or notebook PC.

Flexible Handing Options

Econex packaged units offer flexible handing configurations as standard to suit site requirements.



Economiser Cycle option

The Economy Cycle presents significant energy savings. When the outside ambient air is below set point required, the compressor is cycled off, outside air dampers open, and the supply air fan continues to run, bringing cool air in from outside.



Fresh Air Damper option

The Fresh Air Damper allows the introduction of fresh air into the air conditioned space, there by increasing the amount of oxygen available to the building occupants.



High Static EC Outdoor Fans

High static outdoor fans allows at least 125pa allowing condenser air to be ducted in applications where the unit is positioned inside.



Standard Hand
Horizontal or Downward Discharge

Opposite Hand
Horizontal or Downward Discharge



Econex

OPA Specifications

econex
nex gen R32 inverter

Model	OPA 250	OPA 350	OPA 450	OPA 560	OPA 970
Total (Gross) Capacity kW*					
Cooling	25.4 (10.1~29.1)	35.9 (18~45.4)	44.9 (18.2~52.4)	55.6 (27.4~64.8)	92.5 (15.4~99.2)
Nett (Rated) Capacity kW*					
Cooling	24.6	34.8	43.3	53.5	88.9
Heating	26.9 (6.5~29.3)	37.0 (13.9~47.0)	44.4 (16.5~54.5)	57.0 (24.0~63.1)	88.2 (14.3~96.1)
SEER*					
TCSPP* (Cold/Mixed/Hot)	6.43 / 5.41 / 4.73	4.71 / 5.60 / 4.85	5.20 / 4.56 / 4.34	5.22 / 4.60 / 4.21	4.53 / 4.14 / 4.04
HSPF* (Cold/Mixed/Hot)	2.21 / 2.60 / 3.30	2.85 / 3.00 / 3.07	2.72 / 2.82 / 2.86	2.66 / 2.83 / 2.94	-
EER/COP*					
EER / AEER * Cooling	3.20 / 3.18	3.15 / 3.14	2.99 / 2.98	2.99 / 2.98	2.97 / 2.96
COP / ACOP * Heating	3.33 / 3.31	3.21 / 3.19	3.14 / 3.13	2.98 / 2.97	3.35 / 3.34
Power					
Power Supply	3 Phase 400 V a.c. 50 Hz + N + E				
Run Amps / Phase (A/ph.)	12.5 / 11.5 / 13	17.5 / 15.5 / 19.5	24 / 22 / 24	28 / 26 / 29	46 / 43 / 46
Unit Controllers					
Controller	UC8 (x1)				UC8 (x2)
Ambient Operating Range					
Cooling / Heating (°C)	-10 ~ 52 / -15 ~ 25				-10 ~ 50 / -10 ~ 25

Model	OPA 250	OPA 350	OPA 450	OPA 560	OPA 970
Compressor					
Type	Inverter Scroll x1				Inverter x1, Fixed x1
Refrigerant	R32				
Fans					
Indoor	EC Plug Fan x1				EC Plug Fan x2
Outdoor	EC Axial x1				EC Axial x2
Airflow (l/s)					
Nominal**	1250	1800	2200	2600	4700
Max.@2.5 m/s face velocity	1970	2450	2900	3610	5800
Noise Data***					
SPL @ 3 Metres (dBA)	58	62	64	67	76
Overall Dimensions (mm)					
Length	1795	1795	2330	2330	2898
Width	1530	1530	1530	1530	2151
Height	1545	1850	1500	1805	2258
Weight (kg)					
Nett	511	596	643	759	1270

Notes:

- * To AS/NZS 3823 conditions
- ** Supply Airflow at Nominal Conditions
- *** Noise Data measured to EN 12102-1:2017 - measured in decibels re 1 picowatt
- **** Units comply with MEPS & or the requirements on the NCC



NEW ZEALAND DESIGNED
AND MANUFACTURED



temperzone.com



New Zealand

nzsales@temperzone.com

Singapore

sales@temperzone.com.sg

Australia

ausales@temperzone.com

The specifications of this catalogue may change without prior notice to allow Temperzone to incorporate the latest innovations for its customers. The information contained in the catalogue is merely informative. Temperzone declines any responsibility in the broadest sense, for damage direct or indirect, arising from the use and / or interpretation of the recommendations in this catalogue.

TEM09/23

New Zealand

Auckland	09 – 279 5250
Hamilton	07 – 839 2705
Wellington	04 – 569 3262
Christchurch	03 – 379 3216

Asia

Singapore	65 – 6733 4292
Shanghai	21 – 5648 2078

Australian

Sydney	02 – 8822 5700
Adelaide	08 – 8115 2111
Brisbane	07 – 3308 8333
Melbourne	03 – 8769 7600

Distributors

Newcastle	02 – 4962 1155
Perth	08 – 6399 5900
Launceston	03 – 6331 4209

