## HITACHI




## **Wall Mounted Systems**


Cooling & Heating







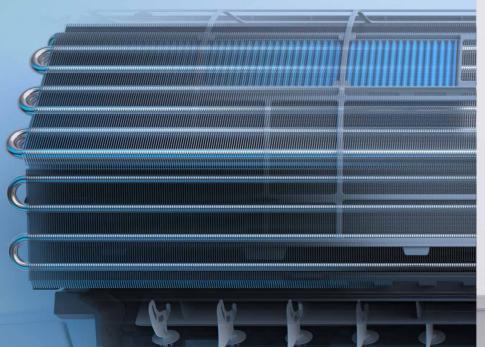

















R32



### Key Features

- Manual FrostWash
- Virosense Filter
- Cascade Vector DC Inverter
- Seamless fan speed control
- Power tracking on optional Wi-Fi
- Dry Mode with Humidity Sensor

WIDE AMBIENT OPERATING RANGE -15°C IN WINTER 46°C IN SUMMER

大 合








- Good Sleep
- Powerful Mode
- Silent Mode
- MY Mode
- Eco Mode
- Leave Home

airHome 400 Wall Mounted Systems

 $\sim$ 

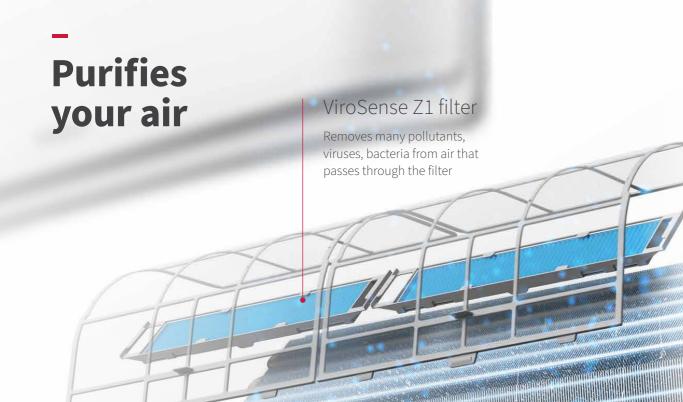

## 

## Not only does airHome keep you comfy,

but it also improves your Indoor Air Quality.

### Anti-Corrosion Coated Fins

offer an added layer of protection from damage caused by corrosive environments.

**Anti-Rust paint** helps to protect the outdoor unit from rust and the unsightly peeling of paint.



 Two identical units were tested for comparison; with and without FrostWash. Test chamber simulated approx. 2 years of dust and oil build up which may be experienced in a typical home environment. Airflow performance was tested before and after FrostWash being in the chamber. Unit without FrostWash experienced an 18% drop in airflow performance. Unit with FrostWash experienced only 6% performance drop. Tested at Johnson Controls-Hitachi Tochigi factory, Japan Nov/Dec 2021. Claim refers to the effect of FrostWash technology which showed 99% reduction of virus particles and 99% reduction of bacteria on the heat exchanger tested at Kitasato Research Center of Environmental Science.

Claim refers to the effect of FrostWash which showed 95.0% reduction of mould on the heat exchanger tested at Kitasato Research Center of Environmental Science

FrostWash

Automatically cleans the heat

exchanger, reducing the build up of

grime, bacteria and certain viruses.

# Helps to clean & maintain itself year after year



## FrostWash: Better at maintaining peak performance

Over time, dust and dirt builds up in your AC making it less powerful.

Regularly running Hitachi's patented FrostWash cycle will remove dust and dirt build up on the heat exchanger, ensuring it continues to run at its peak performance.



### FrostWash double benefits:

## Preserved performance

Our tests show that systems with FrostWash are **Better at maintaining airflow performance** than those without this technology<sup>1</sup>.

## Sanitising effects

On the heat exchanger



eliminated<sup>2</sup>





Bacteria eliminated<sup>2</sup> Mould reduction<sup>3</sup>

(95%)

#### 1

Dirt deposits over time on the heat exchanger which leads to reduced airflow efficiency.

### 3

The mould and dirt detach from the heat exchanger as the frost melts.

4

The dirt and mould are washed away together with the condensate.

#### Bonus Let FrostWash work when you're absent

FrostWash:

freeze the heat

captures the dirt.

exchanger. The frost

2

• The optional **airCloud Go app** includes the control of FrostWash, so you can operate it remotely with your phone.



## Wireless comfort

## Intuitive and convenient comfort control

- 0.5° Set Temperature
- Manual FrostWash
- 5 Fan Speeds + Auto
- My Mode
- Eco Mode
- Leave Home
- Automatic Mode
- Timer OFF/ON
- Good Sleep
- Silent Mode
- Powerful Mode
- Up/Down Louvre Control






Eco mode saves energy

Activate Eco mode to switch to more energy-efficient cooling and heating.

Eco mode automatically adjusts the temperature and fan speed to reduce power consumption, saving energy and reducing your running costs.



Set the GoodSleep Timer on the remote, so once activated, the air conditioner will run for your selected number of hours and then automatically turn off.

### More features providing adaptive comfort



Suitable for large rooms, the airHome 400 Distributes air effectively across any room in your house, reaching up to 24m away<sup>1</sup>



So quiet, you'll forget it's on! Thanks to the unique wave blade fan, the air conditioner will run as quiet as 20dB(A)<sup>2</sup>

Airflow distance will vary according to fan speed setting, environmental factors and model capacity. Claim refers to models RAK-DJ50PHAT and above with a 1. fan speed of 1200rpm creating an air velocity of 0.15m/s or more according to anemometer tests.

- 2.
- The number is observed on airHome400 (2.0~3.5kW model) when the silent mode is set. Tested at Johnson Controls-Hitachi Tochigi factory, Japan



Ensures year-round comfort control


Cooler home in summer Cooling operation up to +46°C outside.

Warmer home in winter Heating operation up to -15°C outside.

### **Energy Efficient**

airHome's DC power system including the Cascade Vector DC Inverter - minimises energy consumed during operation.

During the hours of operation, to promote better sleep, it will allow the temperature to gradually increase by 2°C if in cooling mode, or decrease by 2°C if in heating, and operate the fan in a low-noise mode.



Powerful mode runs your system at maximum cooling or heating, and highest fan speed for 20-minutes to rapidly cool or heat a room



On humid days, Dry Operation dehumidifies the room efficiently and silently

airHome 400 Wall Mounted Systems

## **Effortless comfort** with hassle-free controls

## Control your AC from anywhere


All airHome air conditioners can connect to our next-generation airCloud Go app via home Check and control your air conditioner's status from wherever you are, whenever you need it.

You will never have to worry if you've left the AC on ever again.

## airCloud Go: automated comfort as you come & go

Link your phone's location to your air conditioner with airCloud Go app's Smart-Fence function. Once you are within a preset distance from your home, your airHome air conditioner will automatically start to heat or cool to your ideal temperature for when you arrive.

As you leave home, you can set your air conditioner to automatically turn off or switch to a more energy-efficient temperature.

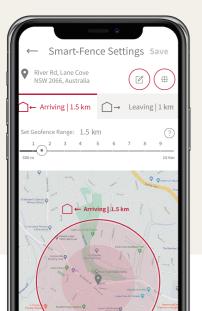

More airCloud Go features for better indoor climate control from the convenience of your phone

Google Play



Turn the air conditioner on/off and set the desired temperature, fan speed and airflow direction

Ø

HITACHI



24°C

"(1) Weekly Timer

airCloud Go app

App Store

(J) Timer





Pair your account with unlimited air conditioners



air

Invite up to 20 users to manage each air conditioner



## airCloud Go voice control with Alexa and Google Home

Via airCloud Go connect your airHome air conditioner to your smart speaker for hands-free operation<sup>3</sup>.



## airCloud Go energy cost estimator

Track AC usage in your home and preview estimates of your daily, weekly, monthly and/ or annual expenditure.

You can also set a budget limit and receive notifications as you near this threshold.

## A brand-new design remote controller

With a more intuitive controller than ever before, controlling your air conditioner has never been easier.

xt	N
(ak-)	Т
$\smile$	y
	~


#### New 'My Mode' button

he new 'My Mode' button enables ou to save up to 3 combinations of your favorite settings (operation mode, set temperature, fan speed) so you can recreate your preferred climate in one touch.



airCloud Go Adapter is available as an optional accessory. Access to a wifi network is required to pair airHome 400 to airCloud Go app. Required router supporting 2.4GHz band.

Amazon Echo supports English, French, Italian, Spanish, German. Google Home supports English, French, Italian, Spanish, German, Portuguese-BR, Dutch, Danish, Swedish, Thailand, Chinese(Traditional), Indonesia.





#### Alexa, decrease temperature by 3°C

			at	÷ =	
nergy	Cost Esti	mat	or		
В	udget (USD/month) USD 50	Bu	dget S	etup	
	Monthly		Yea	arly	
o) 💠 (	inergy (kWh)		1	ompare ist Week	
ist Week)	Energy (	This W	eek)		I
	(Last Week) This Week)	ì		-	
ſ				ł	
	Wed Thu	Pti	Sat	Sun	
<i>←</i>	Day -		$\rightarrow$		
N N	larch 2019		Last up	dated on	1

#### 0.5°C temperature control

Set the temperature by 0.5°C increments for more precise

ŀ	HITACH	
Arrie Contraction		Auto
GoodSleep TrostWash	Temp	Powerful Silent
On Timer Off Timer	ter Re	set Up/Down My Mode

airHome 400 Wall Mounted Systems

ი

## Optional Accessories

### Remote On/Off Adapter

hotel room card key. Save energy by switching the unit off

### Demand Response Module (DRED)

Optional DRM module for instances where local



#### SPX-WKT4 Wired Controller

- Weekly programming: schedule up to 5 on/off and temperature settings per day

- Key lock function: locks all buttons on the remote controller, ideal for homes and offices.
- Multi-lingual support, easy AC operation in your preferred language

- Daylight saving time adjustment

## **Features & Options**

### airHome 400

Manual FrostWash	•
ViroSense Air Purifying Filter	•
Eco mode function	•
Good Sleep	•
Powerful mode	•
Power Safe Mode	•
MY Mode (personalised mode)	•
2-way auto swing (up-down)	•
Auto restart function	•
12-hour timer control	•
Silent Mode	•
Leave home function	•
Backlit wireless remote	•
Power tracking display	
Smart-Fence (geo-location control)	
24/7 time clock function	
24-hour On/Off timer	
Remote on/off input	
SPX-WKT4 Wired Controller	
DRED Demand Response Module	
Wifi connectivity - airCloud Go	

- Standard
- With optional airCloud Go Wifi App
- **Optional Accessory**

## **Specifications**

eries			airHome 400				
	Indoor Unit		RAK-DJ25PHAT	RAK-DJ35PHAT	RAK-DJ50PHAT	RAK-DJ60PHAT	RAK-DJ70PHAT
Model	Outdoor Unit		RAC-DJ25PHAT	RAC-DJ35PHAT	RAC-DJ50PHAT	RAC-DJ60PHAT	RAC-DJ70PHAT
Rated Capacity (Min Max.) Rated Cooling Power Input (Min Max.) Rated Heating Power Input (Min Max.)	Cooling	kW	2.5 (1.0 - 3.2)	3.5 (1.0 - 4.0)	5.0 (1.0 - 5.5)	6.0 (1.9 - 6.8)	7.0 (2.5 - 8.0)
(Min Max.)		kW	3.2 (1.0 - 4.5)	4.0 (1.0 - 5.0)	5.3 (1.0 - 6.5)	7.0 (1.8 - 7.8)	8.0 (1.8 - 8.8)
Rated Cooling Power Input (Min Max.)		kW	0.52 (0.25 ~ 1.29)	0.89 (0.25 ~ 1.46)	1.42 (0.50 ~ 2.10)	1.80 (0.5 ~ 3.05)	2.16 (0.5 ~ 3.50)
Rated Heating Power Input (Min Max.)		kW	0.66 (0.25 ~ 1.25)	0.88 (0.25 ~ 1.70)	1.42 (0.50 ~ 2.75)	1.88 (0.5 ~ 3.05)	2.15 (0.5 ~ 3.50)
Dehumidification		l/h	1.4	1.6	2.0	2.8	4.8
		cooling	5.5	5.0	4.0	4.0	3.5
	Hot Zone	heating	3.5	3.5	3.0	3.0	4.0
		cooling	5.0	4.5	3.5	3.5	3.5
Zone Energy Efficiency	Mixed Zone	heating	3.5	3.0	2.5	2.5	2.5
Star Rating		cooling	5.0	4.5	4.0	4.0	4.0
	Cold Zone	heating	3.0	2.5	2.0	2.0	2.0
	AEER		4.76	3.91	3.52	3.32	3.23
	ACOP		4.81	4.52	3.73		
Derver Greenke		(Dhasa (U-	1.01	4.52		3.71	3.71
Power Supply Rated Running Current	V	/ Phase / Hz			220-240V / 1Ph / 50Hz		
(cooling/heating)		Amps	2.91/3.51	4.53 / 4.29	6.16 / 5.90	7.95 / 8.30	9.53 / 9.49
Maximum Current		Amps	5.33	7.15	11.00	13.00	15.00
Interconnecting Wire			3+EARTH				
Power supply To			outdoor unit				
Operation Range	Cooling	°C			-10°C ~ 46°C		
	Heating	°C		1	-15°C ~ 24°C		
Compressor Type			Rotary	Rotary	2 Cylinder Rotary	2 Cylinder Rotary	2 Cylinder Rotary
Diameter of Pipes	Liquid / Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 12.7	6.35 / 15.8
	Туре		R32				
Refrigerant	Factory pre- charged amount	т	20	20	30	30	30
Min. / Max. / Lift Pipe Length		т	3/20/15	3/20/15	3 / 30 / 20	3/30/20	3 / 30 / 20
	Dimension (WxHxD)	mm	780 × 280 × 222	780 × 280 × 222	780 × 280 × 222	950 x 294 x 230	1050 × 294 × 250
Indoor Unit	Weight	kg	8.4	8.4	8.6	10.5	12.2
	Fan Speeds		Super High / High / Medium / Low / Quiet (+ Auto)				
	Air Flow (cooling	;) l/s	161/124/87/56/53	174/139/111/69/59	197/172/118/80/63	260/236/198/142/112	316/281/235/171/13
	Air Flow (heating		189/156/121/67/58	230/181/161/83/63	235/209/162/128/86	265/236/200/143/111	318/285/240/180/14
	Noise (cooling)	dB(A)	40/38/33/24/20	43/41/36/26/22	47/45/39/33/24	48/45/42/33/30	48/45/42/36/32
	Noise (heating)	dB(A)	41/39/34/23/20	44/42/36/27/21	47/45/39/33/24	48/45/42/33/30	48/45/42/36/32
	Dimensions (WxHxD)	mm	759 × 548 × 288	759 × 548 × 288	792 × 600 × 299	850 × 750 × 298	850 × 800 × 298
	Weight	kg	31.6	31.6	39.5	47.0	49.0
Outdoor Unit	0		60	C1	63	64	65
	Sound Power	dB(A)	60	61	05	04	05

Notes: The Rated Capacity, Power Input and Running Current are measured under T1 (cooling) conditions and H1 (heating) conditions in accordance with AS/NZS 3823.1.1 - 1 metre from the air outlet grille Cooling: Indoor temp: 27°CDB / 19°CWB Heating: Indoor temp: 20°CDB / 15°CWB Outdoor temp: 35°CDB / 24°CWB Outdoor temp: 7°CDB / 6°CWB

## airHome 400

11

airHome 400 Wall Mounted Systems







#### \_

Temperzone

#### ENQUIRIES

ausales@temperzone.com nzsales@temperzone.com

#### AUSTRALIA

Sydney:	(02) 8822 5700
Melbourne:	(03) 8769 7600
Brisbane:	(07) 3308 8333
Adelaide:	(08) 8115 2111

#### DISTRIBUTORS

Newcastle:	(02) 4962 1155
Perth:	(08) 6399 5900
Launceston:	(03) 6331 4209

#### NEW ZEALAND

Auckland:	(09) 279 5250
Hamilton:	(07) 839 2705
Wellington:	(04) 569 3262
Christchurch:	(03) 379 3216

Due to ongoing product development and improvements, the specifications, designs and information conveyed in this brochure are subject to change without notice. Unit colours shown are as close as possible to actual unit. The information contained in this catalogue is merely informative. Hitachi Cooling & Heating declines any responsibility in the broadest sense, for damage, direct or indirect, arising from the use and / or interpretation of the recommendations in this catalogue.



WARRANTY

Must be maintained in accordance with maintenance recommendations.

hitachiaircon.com.au hitachiaircon.co.nz